

Five Highlights of the Lenovo ThinkSystem SR850 V2 Article

The Lenovo ThinkSystem SR850 V2 is designed for high-growth workloads; in-memory computing, databases and virtualization, with large memory and storage capacities. Let's take a look at five highlights of the SR850 V2 server.

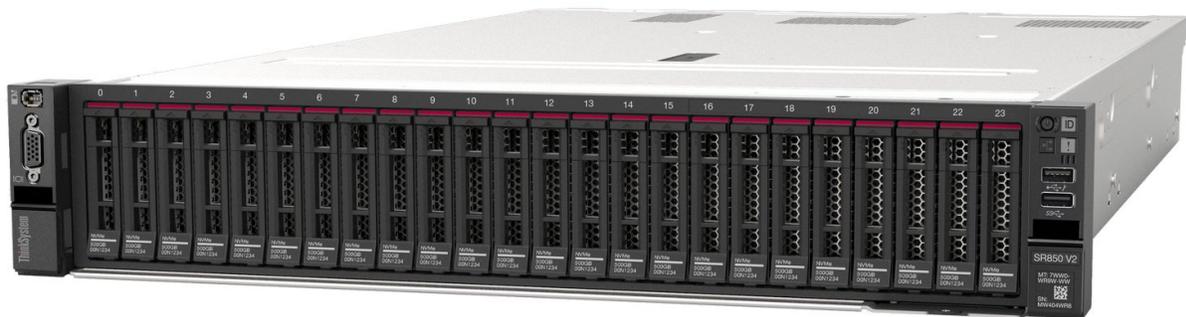


Figure 1. ThinkSystem SR850 V2

1. 4S Density

Density allows you to grow your business without expanding your data center. A dense server allows more processing and storage capabilities in same amount of data center space. As companies grow, so too do their hardware needs and with them the need for someplace to store all of that hardware. Acquiring new space through expansion of the data center or the creation of new data centers can be expensive, disruptive, and sometimes impossible.

The SR850 V2 is a dense, four socket (4S) server with high performance, scalability and up to 48 DIMMs in a dense 2U chassis. Compared to a typical 2U -2S system, the SR850 V2 can pack twice the amount of CPUs, cores and memory in the same rack space within the data center

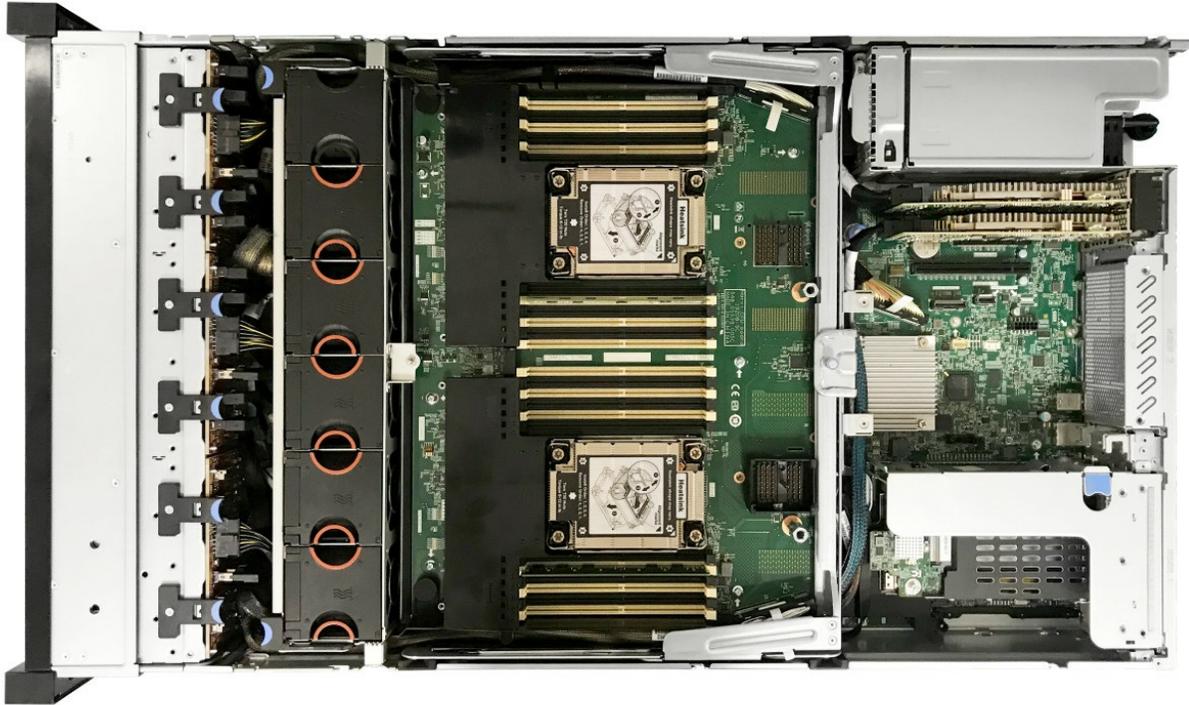


Figure 2. Internal view of the SR850 V2

2. High Memory & Virtualization Capability

The Lenovo SR850 V2 provides high memory and virtualization capabilities.

A server with In-memory computing allows the processing of tremendous quantities of data in main memory to provide immediate results from analysis and transaction. The data is available for processing or analysis immediately after it is created.

Strong virtualization capabilities create a more dynamic and fluid environment in which compute capacity can be treated as a resource pool, protecting application service levels and improving agility and responsiveness to business needs. Importantly, virtualization isolates workloads so that they do not interfere with one another.

The SR850 V2 with the new 3rd Generation Xeon Scalable Family processors supports up to 12TB of memory. This massive amount of memory enables the SR850 V2 to support memory intensive workloads and implement large virtual machines or run very large in-memory databases.

The SR850 V2 supports Intel Optane Persistent Memory 200 Series which is the next generation persistent memory modules that enable unprecedented memory capacity and the fastest access to persistently stored data. Unlike conventional DDR memory, persistent memory retains its data even if power is unexpectedly lost and provides much faster access to persistent data than reading from a mainstream SSD.

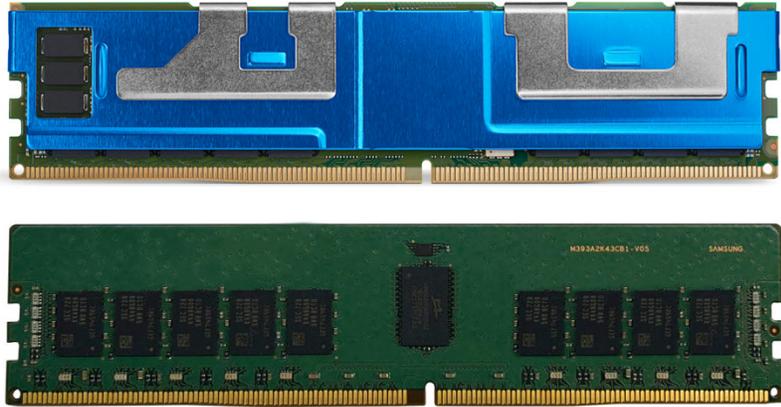


Figure 3. Intel Optane Persistent Memory 200 Series module (top) and standard memory DIMM (bottom)

3. Compute and Memory Scalability

Scalability allows a system to expand to meet increasing performance and sizing workload demands. Scaling memory is how much memory you can add to your server. Processor scaling is how many and the types of processors you can add to your server. Enterprises need assurance that the architecture is designed in such a way that system capacity can be increased as the needs of the business change.

The SR850 V2 provides seamless scalability to meet increasing workload demands and allow you to scale the system to meet your needs. The SR850 V2 supports from 2 to 4 processors. Expanding from 2 processors to 4 processors is as simple as docking the top processor and memory tray into the server. In terms of storage, the SR850 V2 supports up to 24 2.5" HDD/SSD and up to 24 NVMe drives. For rear I/O, you can add PCIe risers to increase I/O capabilities up to 7 rear facing PCIe 3.0 adapters plus a dedicated OCP 3.0 LOM. The SR850 V2 supports 1 DIMM per CPU or up to up to 12 DIMMs per CPU to match your memory needs.

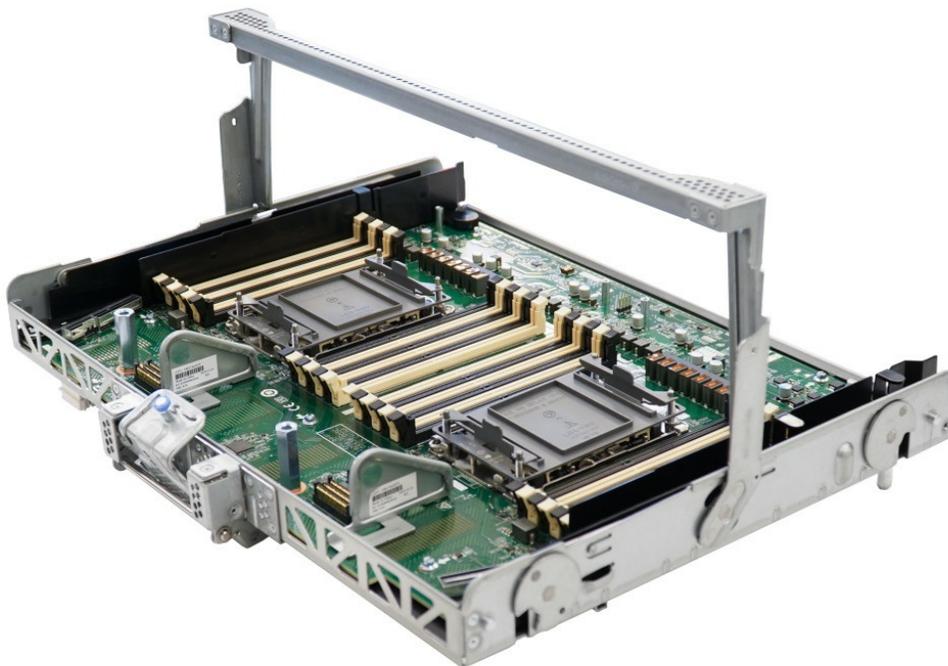


Figure 4. Processor and memory expansion tray

4. Storage Capabilities

The SR850 V2 provides up to 24 2.5" storage bays. Within these 24 storage bays, you can install up to 24 SAS/SATA HDDs or SSDs. The system also supports two 7mm rear accessible drives used for boot drives. In term of NVMe, the SR850 V2 supports up to 24 NVMe drives which is more than double the number of NVMe drives that the predecessor system supported. With the NVMe drives the SR850 v2 supports Virtual RAID on CPU (VROC) which is an Enterprise, hybrid RAID solution especially designed for NVMe SSDs.

Advantages of onboard local storage

- Speed of accessing your data. Local storage results in very low latency and fast response times. No worry of upload or download speeds retrieving your data.
- Better security and control. Keeps critical data in-house. No third party has access to your information. Healthcare is especially sensitive to who and where the data is stored.
- Complete control over the data because the data is stored locally and you have control over the server.
- The data is easily accessible.
- Less regulatory hurdles. Some Countries require to process and store data within the Country.
- No competing for storage resources with shared storage.
- Saves on cost and rack 2 space without the need to purchase separate storage chassis.

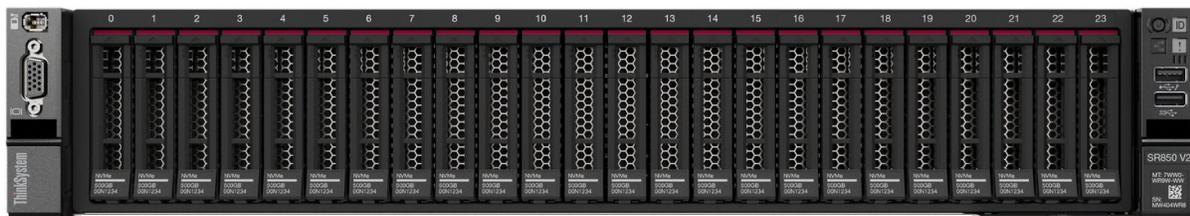


Figure 5. ThinkSystem SR850 V2 with 24 NVMe drives

5. Reliability and Availability for Mission Critical Workloads

Mission-critical workloads support the business in every dimension—its organization, its employees and its customers. These workloads are the most demanding types of applications and databases running on servers today, and include ERP, CRM, data warehouses, business intelligence and analytics. They must be available on a 24 x 7 x 365 basis.

Any outage of the mission-critical server infrastructure results in reduced revenue, reduced profitability, reduced employee productivity, and reduced customer loyalty. Any interruption in the operation or availability of these workloads will have a ripple effect throughout the organization because downtime interferes with business processes and interrupts business continuity. That means that mission-critical workloads must run on highly reliable and available platforms to ensure that business processes are running smoothly.

Lenovo servers continue to be the industry's #1 most reliable, with the industry's highest customer reliability rating. Lenovo x86 servers had the best uptime among all x86 platforms for the 7th straight year.

The SR850 V2 features advanced reliability, availability and serviceability (RAS) features. Including Intel "Run Sure" RAS features and Lenovo unique RAS features. The SR850 V2 provides detection and self-healing of errors as well as the ability of the system to continue processing production workloads, even in the presence of faults. The self-healing technology proactively identifies potential failures and transparently takes necessary corrective actions. Light path diagnostics allows you to diagnose the source of problems in seconds instead of hours or days. Light path diagnostics works hand-in-hand with Predictive Failure Analysis (PFA), which monitors multiple types of system components within the server.

Further reading

For further reading, see these SR850 V2 resources:

- [SR850 V2 Datasheet](#)
- [SR850 V2 Product guide](#)
- [SR850 V2 Product web page](#)

This article is one in a series on the ThinkSystem SR850 V2 and SR860 V2 servers:

- **[Five Highlights of the Lenovo ThinkSystem SR850 V2](#)**
- [Five Highlights of the Lenovo ThinkSystem SR860 V2](#)
- [Why Scale-Up With 4S and 8S Servers?](#)
- [Unique Intel Features Available with ThinkSystem SR850 V2 and SR860 V2](#)
- [ThinkSystem SR860 V2 is the New 4S Performance Leader](#)
- [The Value of Refreshing Your 4-Socket Servers with the ThinkSystem SR860 V2 and SR850 V2](#)
- [The Perfect 4-Socket and 8-Socket Servers for SAP HANA](#)
- [Total Cost of Ownership Comparison of Running SAP HANA on Lenovo ThinkSystem Servers](#)

About the author

Randall Lundin is a Senior Product Manager in the Lenovo Infrastructure Solution Group. He is responsible for planning and managing ThinkSystem servers. Randall has also authored and contributed to numerous Lenovo Press publications on ThinkSystem products.

Related product families

Product families related to this document are the following:

- [ThinkSystem SR850 V2 Server](#)

Notices

Lenovo may not offer the products, services, or features discussed in this document in all countries. Consult your local Lenovo representative for information on the products and services currently available in your area. Any reference to a Lenovo product, program, or service is not intended to state or imply that only that Lenovo product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any Lenovo intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any other product, program, or service. Lenovo may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

Lenovo (United States), Inc.
8001 Development Drive
Morrisville, NC 27560
U.S.A.
Attention: Lenovo Director of Licensing

LENOVO PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. Lenovo may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

The products described in this document are not intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. The information contained in this document does not affect or change Lenovo product specifications or warranties. Nothing in this document shall operate as an express or implied license or indemnity under the intellectual property rights of Lenovo or third parties. All information contained in this document was obtained in specific environments and is presented as an illustration. The result obtained in other operating environments may vary. Lenovo may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Any references in this publication to non-Lenovo Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this Lenovo product, and use of those Web sites is at your own risk. Any performance data contained herein was determined in a controlled environment. Therefore, the result obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

© Copyright Lenovo 2023. All rights reserved.

This document, LP1344, was created or updated on June 18, 2020.

Send us your comments in one of the following ways:

- Use the online Contact us review form found at:
<https://lenovopress.lenovo.com/LP1344>
- Send your comments in an e-mail to:
comments@lenovopress.com

This document is available online at <https://lenovopress.lenovo.com/LP1344>.

Trademarks

Lenovo and the Lenovo logo are trademarks or registered trademarks of Lenovo in the United States, other countries, or both. A current list of Lenovo trademarks is available on the Web at <https://www.lenovo.com/us/en/legal/copytrade/>.

The following terms are trademarks of Lenovo in the United States, other countries, or both:

Lenovo®

ThinkSystem®

The following terms are trademarks of other companies:

Intel®, Intel Optane™, and Xeon® are trademarks of Intel Corporation or its subsidiaries.

Other company, product, or service names may be trademarks or service marks of others.