

Lenovo ThinkAgile VX2320, VX3320, VX7320-N 1U Appliances and VX 1U Certified Node (Intel Xeon SP Gen 2)

Product Guide

The Lenovo ThinkAgile VX2320, VX3320, VX7320-N Appliances and VX 1U Certified Node are 2-socket 1U systems that feature the 2nd Generation Intel Xeon Scalable processors. These systems are based on the ThinkSystem SR630 with up to 28 cores per processor, up to 3 TB of TruDDR4 memory with up to 2933 MHz memory speeds, and an extensive selection of internal storage and networking options. VMware offers a unique, software-defined approach to hyperconvergence, leveraging the hypervisor to deliver compute, storage and management in a tightly integrated software stack.

The 1U systems are available either as an appliance or certified node:

- VX2320 for workloads used by small-to-medium businesses
- VX3320 for compute-heavy workloads
- VX7320-N for high performance workloads benefiting from all-NVMe storage
- VX 1U Certified Node

Suggested uses: Inference, virtualization, VDI, HPC, Hyperconverged infrastructure



Figure 1. Lenovo ThinkAgile VX with 3.5-inch drive bays

Did you know?

The ThinkAgile VX2320, VX3320, VX7320-N Appliances and VX 1U Certified Node are built on the Lenovo ThinkSystem SR630 server that features enterprise-class reliability, management, and security.

The VX2320, VX3320, VX7320-N Appliances offer ThinkAgile Advantage Single Point of Support for quick 24/7 problem reporting and resolution.

Key features

The ThinkAgile VX2320, VX3320, VX7320-N Appliances and VX 1U Certified Node offer the following key features:

- Factory-integrated, pre-configured ready-to-go appliances built on proven and reliable Lenovo ThinkSystem servers that provide compute power for a variety of workloads and applications and powered by industry-leading hyperconverged infrastructure software from VMware.
- Provide quick and convenient path to implement a hyperconverged solution powered by VMware vSAN with "one stop shop" and a single point of contact provided by Lenovo for purchasing, deploying, and supporting the solution.
- Meet various workload demands with cost-efficient hybrid or performance-optimized all-flash storage configurations.
- Deliver fully validated and integrated hardware and firmware that is certified with VMware software.
- Appliances include Lenovo ThinkAgile Advantage Single Point of Support for quick 24/7 problem reporting and resolution.
- Offer Lenovo deployment services to get customers up and running quickly.

The VMware software running on ThinkAgile VX2320, VX3320, VX7320-N Appliances and VX 1U Certified Node delivers the following key features:

- Distributed architecture that allows "pay-as-you-grow", non-disruptive scaling by adding new nodes to the cluster (scale-out) to increase capacity and performance.
- Advanced capacity management, including deduplication, compression, and erasure coding (RAID 5/6), which helps deliver greater storage utilization with dramatically lower storage capacity and costs.
- Automation of VM storage provisioning and control of storage service levels (capacity, performance, availability) with VM-centric policies to load balance storage resources.
- Native HCI security solution with two-factor authentication (SecurID and CAC) and data-at-rest encryption that does not require self-encrypting drives (SEDs).
- Stretched cluster with local and site failure protection between two geographically dispersed sites for higher level of availability with near zero downtime.
- Centralized management with provisioning, administering, and monitoring virtual resources across multiple hosts and clusters from a centralized interface.
- Rapid workload provisioning, simplified data center operations, increased business efficiency, and decreased CAPEX and OPEX costs.
- VM and data protection with agent-less, image-level virtual machine backups and application-aware protection for business-critical Microsoft applications (Exchange, SQL Server, SharePoint) along with WAN-efficient, encrypted backup data replication.
- Reduced unplanned downtime and virtually eliminated planned downtime for server and storage maintenance with live workload migration, high availability, and fault tolerance.
- Enhanced application performance and availability with resource management, load balancing, and access prioritization.
- Intelligent operations management and automation to proactively monitor and manage compute, storage, and networking resources, identify performance bottlenecks, and re-balance workloads by leveraging predictive analytics.
- Capacity planning and optimization guidance to address future needs with performance trends, projections and extended forecasts.
- Managing remote offices and branch offices with rapid provisioning of servers through virtualization, minimization of host configuration drift, and enhanced visibility into regulatory compliance, across multiple sites.

Components and connectors

The ThinkAgile VX2320, VX3320, VX7320-N Appliances and VX 1U Certified Node are based on the ThinkSystem SR630 server.

The following figure shows the front view of the VX2320 Appliance and VX 1U Certified Node with 4x 3.5-inch front drive bays.

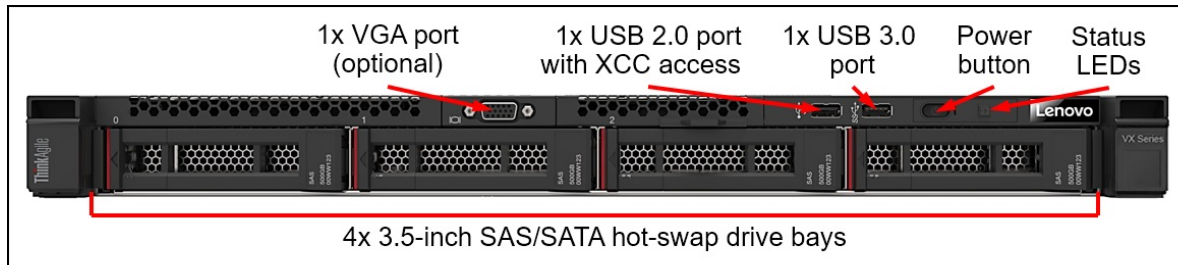


Figure 2. Front view with 3.5-inch drive bays

The following figure shows the front view of the VX3320 Appliance, VX7320-N Appliance and VX 1U Certified Node with 10x 2.5-inch drive bays.

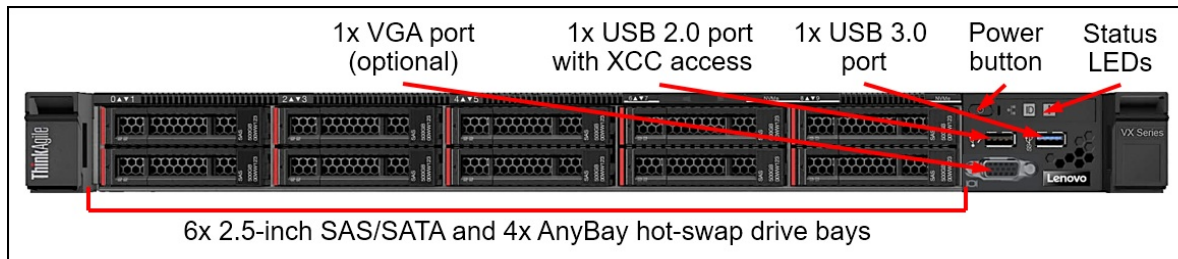


Figure 3. Front view with 2.5-inch drive bays

The following figure shows the rear view of all VX systems. The VX 1U Certified Node optionally supports 2x 2.5-inch drive bays in the place of 2 of the PCIe slots.

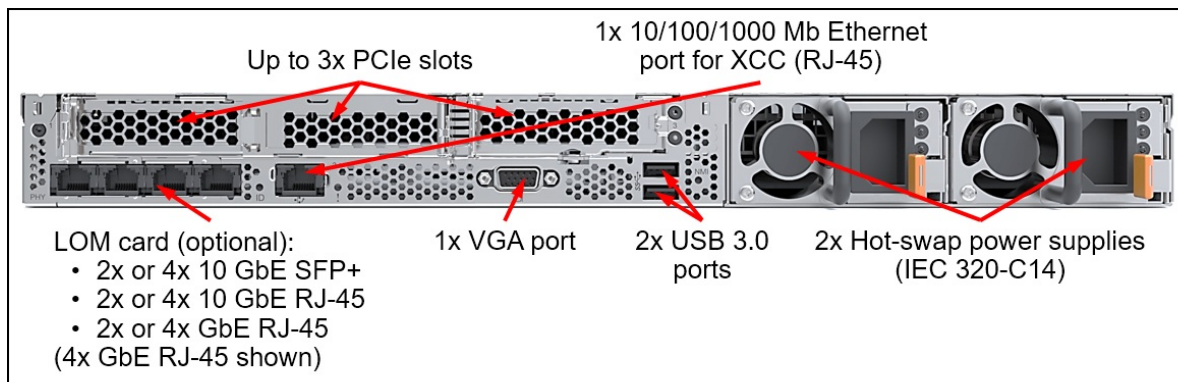


Figure 4. Rear view

Standard specifications

The ThinkAgile VX2320, VX3320, VX7320-N Appliances and VX 1U Certified Node are based on the ThinkSystem SR630 server.

The following table provides an overview comparison between the VX systems.

Table 1. Comparison of features

	VX2320	VX3320	VX7320-N	VX 1U
VX offering type	Appliance	Appliance	Appliance	Certified Node
Target workloads	SMB	Compute heavy	High performance	Compute heavy
Base MTM	7Y93CTO2WW	7Y93CTO1WW	7Y93CTO3WW	7Y93CTO4WW
Form Factor	1U	1U	1U	1U
Base platform	SR630	SR630	SR630	SR630
CPU	1x or 2x Intel Xeon SP Gen 2	1x or 2x Intel Xeon SP Gen 2	2x Intel Xeon SP Gen 2	1x or 2x Intel Xeon SP Gen 2
Memory	24x DDR4 2933 MHz (3TB max)	24x DDR4 2933 MHz (3TB max)	24x DDR4 2933 MHz (3TB max)	24x DDR4 2933 MHz (3TB max)
Drive Bays	<ul style="list-style-type: none"> 4x 3.5" SAS/SATA (front) 	<ul style="list-style-type: none"> 6x 2.5" SAS/SATA & 4x 2.5" AnyBay (front) 	<ul style="list-style-type: none"> 10x 2.5" NVMe (front) 	<ul style="list-style-type: none"> 4x 3.5" SAS/SATA (front) + 2x 2.5" SAS/SATA (rear) 4x 3.5" AnyBay (front) 6x 2.5" SAS/SATA & 4x 2.5" AnyBay (front) + 2x 2.5" SAS/SATA (rear) 10x 2.5" NVMe (front)
Drive Configuration	All Flash Hybrid	All Flash Hybrid	All Flash	All Flash Hybrid
HBA	430-8i HBA	430-16i HBA	No support*	430-8i HBA 430-16i HBA
Boot drives	2x M.2 SATA	2x M.2 SATA	2x M.2 SATA	2x M.2 SATA
LOM networking	1x LOM adapter, 1Gb or 10Gb	1x LOM adapter, 10Gb	1x LOM adapter, 10Gb	1x LOM adapter, 1Gb or 10Gb
PCIe networking	Up to 3x adapters 10Gb, 25Gb	Up to 3x adapters 10Gb, 25Gb	Up to 3x adapters 10Gb, 25Gb	Up to 3x adapters 1Gb, 10Gb, 25Gb, 40Gb, 100Gb
GPUs	No support	No support	No support	Up to 3x GPUs
Hypervisor	VMware ESXi	VMware ESXi	VMware ESXi	VMware ESXi

* NVMe ports and switch adapters are used instead of a SAS HBA

The following table lists the standard specifications.

Table 2. Standard specifications

Components	Specification
Machine types	7Y93 - 3 year warranty
Form factor	1U rack.
Processor	One or two 2nd Gen Intel Xeon Scalable processors (formerly codenamed "Cascade Lake")
Chipset	Intel C624 chipset, part of the platform codenamed "Purley"
Memory	24 DIMM slots (up to 12 DIMMs per processor; six memory channels per processor with two DIMMs per channel) with support for RDIMMs and 3DS RDIMM at up to 2933 MHz.
Persistent memory	VX 1U Certified Node support up to 12x TruDDR4 2666 MHz DCPMMs in the DIMM slots.
Memory maximum	Up to 3 TB with 128 GB 3DS RDIMMs and two processors. Memory DIMMs and persistent memory modules (Memory Mode): Up to 6 TB with 12x 512 GB DCPMMs (Up to 3 TB per processor). Note: Systems with more than 1 TB of memory capacity per socket require processors with an L suffix.
Memory protection	Error correction code (ECC), Single Device Data Correction (SDDC; for x4-based memory DIMMs), Adaptive Double Device Data Correction (ADDDC; for x4-based memory DIMMs, requires Intel Xeon Gold or Platinum processors), patrol scrubbing, and demand scrubbing.
Hot-swap drive bays	<ul style="list-style-type: none"> ● VX2320: 4x 3.5" SAS/SATA (front) ● VX3320: 6x 2.5" SAS/SATA & 4x 2.5" AnyBay (front) ● VX7320-N: 10x 2.5" NVMe (front) ● VX 1U Certified Node: <ul style="list-style-type: none"> ○ 4x 3.5" SAS/SATA (front) + 2x 2.5" SAS/SATA (rear) ○ 4x 3.5" AnyBay (front) ○ 6x 2.5" SAS/SATA & 4x 2.5" AnyBay (front) + 2x 2.5" SAS/SATA (rear) ○ 10x 2.5" NVMe (front)
Internal storage	<ul style="list-style-type: none"> ● 1 drive group: 1 cache drive + 2-7 capacity drives ● 2 drive groups: 1 cache drive + 2-6 capacity drives in each group Note: The quantity of the capacity drives in each drive group must be the same.
Storage controller	<ul style="list-style-type: none"> ● 12 Gbps SAS/6 Gbps SATA non-RAID: <ul style="list-style-type: none"> ○ 430-8i HBA (VX2320 and VX 1U Certified Node) ○ 430-16i HBA (VX3320 and VX 1U Certified Node) ● NVMe PCIe non-RAID (VX7320-N and VX 1U Certified Node) <ul style="list-style-type: none"> ○ Onboard NVMe ○ 810-4P NVMe Switch Adapter ○ 1610-4P NVMe Switch Adapter
Network interfaces	Onboard LOM slot for an adapter with up to 4x 1Gb or 10 Gb Ethernet ports Additional network adapters in PCIe slots
PCI Expansion slots	Up to four slots. Slot 4 is the fixed slot on the system planar, and the remaining slots depend on the riser cards installed. The slots are as follows: <ul style="list-style-type: none"> ● Slot 1: PCIe 3.0 x8, ML2 x8, or ML2 x16; low profile (for a network adapter) ● Slot 2: PCIe 3.0 x16 or x8; low profile or full-height, half-length (for a network adapter) ● Slot 3: PCIe 3.0 x16; low profile (for a network adapter) ● Slot 4: PCIe 3.0 x8 (for an internal storage controller)

Components	Specification
GPU support	VX 1U Certified Node supports up to 3x single-wide GPUs
Boot drives	2x M.2 non-hot-swap SSDs (RAID-1)
Ports	<ul style="list-style-type: none"> • Front: 1x USB 2.0 port with XClarity Controller access, 1x USB 3.0 port, 1x VGA port (optional). • Rear: 2x USB 3.0 ports, 1x VGA port, 1x RJ-45 10/100/1000 Mb Ethernet port for systems management.
Cooling	Five (one processor) or seven (two processors) hot-swap system fans with N+1 redundancy.
Power supply	One or two redundant hot-swap 750 W or 1100 W (100 - 240 V) High Efficiency Platinum power supplies, or 750 W (200 - 240 V) High Efficiency Titanium power supplies.
Video	G200 graphics with 16 MB memory with 2D hardware accelerator, integrated into the XClarity Controller. Maximum resolution is 1920x1200 32bpp at 60Hz.
Hot-swap parts	Drives, power supplies, and fans.
Systems management	Lenovo XClarity Controller (XCC) Enterprise (Pilot 4 chip), proactive platform alerts, light path diagnostics, Lenovo XClarity Administrator with Integrator for VMware vCenter, Lenovo XClarity Energy Manager (optional).
Security features	Power-on password, administrator's password, secure firmware updates, Trusted Platform Module (TPM) 1.2 or 2.0 (configurable UEFI setting). Optional lockable front bezel.
Software	Software licenses that can be purchased from Lenovo or provided by the customer: <ul style="list-style-type: none"> • VMware vSAN: Standard, Advanced, Enterprise, Enterprise Plus, ROBO or Desktop • VMware vSphere: Standard, Enterprise Plus or ROBO • HCI Kit: Essentials, Standard, Advanced, Enterprise or ROBO • VMware Horizon: Standard, Advanced or Enterprise • VMware Cloud Foundation (VCF): Basic, Standard, Advanced, Enterprise or for VDI • VMware vCenter Server: Foundation or Standard
Hypervisors	VMware ESXi. See Operating system support section for details.
Warranty and support	Three- or five-year customer-replaceable unit and onsite limited hardware warranty with ThinkAgile Advantage Support and selectable service levels: 9x5 next business day (NBD) parts delivered, 9x5 NBD onsite response, 24x7 coverage with 2-hour or 4-hour onsite response, or 6-hour or 24-hour committed repair (select areas). Also available are YourDrive YourData, Premier Support, and Enterprise Software Support.
Software maintenance	One- (PRC only), three-, or five-year software support and subscription (matches the duration of the selected warranty period).
Dimensions	Width: 435 mm (17.1 in.), height: 43 mm (1.7 in.), depth: 750 mm (29.5 in.).
Weight	Minimum configuration: 11.9 kg (26.2 lb), maximum: 18.8 kg (41.4 lb)

Models

Factory-integrated models of the ThinkAgile VX Series Appliances are configured by using the Lenovo Data Center Solution Configurator (DCSC), <http://dcsc.lenovo.com>.

During the configuration process, you are selecting one of the Configure-to-Order (CTO) base models first, and then you are adding components (processors, memory, drives, and network adapters) to the selected model.

Note: You are required to engage a Lenovo representative in the project that includes the ThinkAgile VX Series Appliances. ThinkAgile VX certified nodes do not have this requirement.

The following table lists the CTO base models.

Table 3. CTO base models

Machine Type/Model	Description
7Y93CTO2WW	ThinkAgile VX2320 Appliance
7Y93CTO1WW	ThinkAgile VX3320 Appliance
7Y93CTO3WW	ThinkAgile VX7320-N Appliance
7Y93CTO4WW	ThinkAgile VX 1U Certified Node

Models of the VX systems are defined based on whether the systems have 10x 2.5-inch drive bays at the front (called the 2.5-inch chassis) or whether they have 4x 3.5-inch drive bays at the front (called the 3.5-inch chassis). For models, the feature codes for these chassis bases are as listed in the following table.

Table 4. Chassis base feature codes

Feature	Description	Maximum supported			
		VX2320	VX3320	VX7320-N	VX 1U
B1DK	ThinkAgile VX 1U 2.5" 10 Bay Chassis	No	1	1	1
B1DL	ThinkAgile VX 1U 3.5" 4 Bay Chassis	1	No	No	1

Comparison with the ThinkSystem SR630

The ThinkAgile VX2320, VX3320, VX7320-N Appliances and VX 1U Certified Node are based on the ThinkSystem SR630 server, however there are key differences:

- No onboard SATA controller support
- No RAID adapter support
- No SATA HDDs
- No EDSFF drives support
- No SED drive support
- No Fibre Channel support
- No InfiniBand support
- Drives are categorized as Cache or Capacity drives and are formed as disk groups (up to 2 disk groups)

For details about the ThinkSystem SR630, see the SR630 product guide:

<https://lenovopress.com/lp1049-thinksystem-sr630-server>

To verify what specific hardware components are supported with the VX2320, VX3320, VX7320-N, and 1U Certified Node, see the DCSC configurator:

<https://dcsc.lenovo.com>

Processors

The VX2320, VX3320, VX7320-N, and 1U Certified Node systems support the following processors.

For details about these options, including configuration rules, see the SR630 product guide:

<https://lenovopress.com/lp1049-thinksystem-sr630-server#processors>

Table 5. Processor choices

Part number	Feature	Description	Maximum supported			
			VX2320	VX3320	VX7320-N	VX 1U
Intel Xeon Bronze processors						
4XG7A37939	B4HU	Intel Xeon Bronze 3204 6C 85W 1.9GHz Processor	2	2	2	2
4XG7A37990	B7N3	Intel Xeon Bronze 3206R 8C 85W 1.9GHz Processor	2	2	2	2
Intel Xeon Silver processors						
4XG7A37936	B4HT	Intel Xeon Silver 4208 8C 85W 2.1GHz Processor	2	2	2	2
4XG7A37933	B4HS	Intel Xeon Silver 4210 10C 85W 2.2GHz Processor	2	2	2	2
4XG7A37988	B7N5	Intel Xeon Silver 4210R 10C 100W 2.4GHz Processor	2	2	2	2
4XG7A63300	BAZT	Intel Xeon Silver 4210T 10C 95W 2.3GHz Processor	2	2	2	2
4XG7A37930	B4HR	Intel Xeon Silver 4214 12C 85W 2.2GHz Processor	2	2	2	2
4XG7A37987	B7N6	Intel Xeon Silver 4214R 12C 100W 2.4GHz Processor	2	2	2	2
4XG7A37942	B4NW	Intel Xeon Silver 4214Y 12/10/8C 85W 2.2GHz Processor	2	2	2	2
4XG7A37927	B4HQ	Intel Xeon Silver 4215 8C 85W 2.5GHz Processor	2	2	2	2
4XG7A63298	BAZU	Intel Xeon Silver 4215R 8C 130W 3.2GHz Processor	2	2	2	2

Part number	Feature	Description	Maximum supported			
			VX2320	VX3320	VX7320-N	VX 1U
4XG7A37924	B4HP	Intel Xeon Silver 4216 16C 100W 2.1GHz Processor	2	2	2	2
Intel Xeon Gold processors						
4XG7A37917	B4HN	Intel Xeon Gold 5215 10C 85W 2.5GHz Processor	2	2	2	2
4XG7A37911	B4P9	Intel Xeon Gold 5215L 10C 85W 2.5GHz Processor	2	2	2	2
4XG7A37920	B4HM	Intel Xeon Gold 5217 8C 115W 3.0GHz Processor	2	2	2	2
4XG7A37896	B4HL	Intel Xeon Gold 5218 16C 125W 2.3GHz Processor	2	2	2	2
4XG7A37959	B6BS	Intel Xeon Gold 5218B 16C 125W 2.3GHz Processor	2	2	2	2
4XG7A63296	BAZS	Intel Xeon Gold 5218R 20C 125W 2.1GHz Processor	2	2	2	2
4XG7A37966	B4P3	Intel Xeon Gold 5218T 16C 105W 2.1GHz Processor	2	2	2	2
4XG7A37893	B4HK	Intel Xeon Gold 5220 18C 125W 2.2GHz Processor	2	2	2	2
4XG7A37984	B7N9	Intel Xeon Gold 5220R 24C 150W 2.2GHz Processor	2	2	2	2
4XG7A38018	B6CW	Intel Xeon Gold 5220S 18C 125W 2.7GHz Processor	2	2	2	2
4XG7A15809	B6CQ	Intel Xeon Gold 5220T 18C 105W 1.9GHz Processor	2	2	2	2
4XG7A37952	B5S1	Intel Xeon Gold 5222 4C 105W 3.8GHz Processor	2	2	2	2
CTO only	BAZV	Intel Xeon Gold 6208U 16C 150W 2.9GHz Processor	1	1	1	1
4XG7A38022	B6CV	Intel Xeon Gold 6222V 20C 115W 1.8GHz Processor	2	2	2	2
4XG7A38020	B6CL	Intel Xeon Gold 6226 12C 125W 2.7GHz Processor	2	2	2	2
4XG7A63292	BAZW	Intel Xeon Gold 6226R 16C 150W 2.9GHz Processor	2	2	2	2
4XG7A37890	B4HJ	Intel Xeon Gold 6230 20C 125W 2.1GHz Processor	2	2	2	2
4XG7A15720	B5RY	Intel Xeon Gold 6230N 20C 125W 2.3GHz Processor	2	2	2	2
4XG7A63290	BAZX	Intel Xeon Gold 6230R 26C 150W 2.1GHz Processor	2	2	2	2
4XG7A15808	B6CP	Intel Xeon Gold 6230T 20C 125W 2.1GHz Processor	2	2	2	2
4XG7A38000	B6CK	Intel Xeon Gold 6234 8C 130W 3.3GHz Processor	2	2	2	2
4XG7A38024	B6CJ	Intel Xeon Gold 6238 22C 140W 2.1GHz Processor	2	2	2	2
4XG7A38002	B6CR	Intel Xeon Gold 6238L 22C 140W 2.1GHz Processor	2	2	2	2
4XG7A63288	BAZL	Intel Xeon Gold 6238R 28C 165W 2.2GHz Processor	2	2	2	2
4XG7A37884	B4HH	Intel Xeon Gold 6240 18C 150W 2.6GHz Processor	2	2	2	2
4XG7A38014	B6CS	Intel Xeon Gold 6240L 18C 150W 2.6GHz Processor	2	2	2	2
4XG7A63519	BAZM	Intel Xeon Gold 6240R 24C 165W 2.4GHz Processor	2	2	2	2
4XG7A37904	B4NV	Intel Xeon Gold 6240Y 18/14/8C 150W 2.6GHz Processor	No	2	2	2
4XG7A37887	B4HG	Intel Xeon Gold 6242 16C 150W 2.8GHz Processor	2	2	2	2
4XG7A63284	BAZN	Intel Xeon Gold 6242R 20C 205W 3.1GHz Processor	No	2	2	2
4XG7A15875	B4HF	Intel Xeon Gold 6244 8C 150W 3.6GHz Processor	2	2	2	2
4XG7A63282	BAZP	Intel Xeon Gold 6246R 16C 205W 3.4GHz Processor	2	2	2	2
4XG7A15893	B4HE	Intel Xeon Gold 6248 20C 150W 2.5GHz Processor	2	2	2	2
4XG7A63280	BAZQ	Intel Xeon Gold 6248R 24C 205W 3.0GHz Processor	No	2	2	2
4XG7A15890	B4HC	Intel Xeon Gold 6252 24C 150W 2.1GHz Processor	2	2	2	2

Part number	Feature	Description	Maximum supported			
			VX2320	VX3320	VX7320-N	VX 1U
4XG7A15812	B6CT	Intel Xeon Gold 6252N 24C 150W 2.3GHz Processor	2	2	2	2
4XG7A15873	B4HD	Intel Xeon Gold 6254 18C 200W 3.1GHz Processor	No	2	2	2
4XG7A63278	BAZR	Intel Xeon Gold 6258R 28C 205W 2.7GHz Processor	No	2	2	2
4XG7A38009	B6CU	Intel Xeon Gold 6262V 24C 135W 1.9GHz Processor	2	2	2	2
Intel Xeon Platinum processors						
4XG7A37899	B5RZ	Intel Xeon Platinum 8253 16C 125W 2.2GHz Processor	2	2	2	2
4XG7A37948	B5S2	Intel Xeon Platinum 8256 4C 105W 3.8GHz Processor	2	2	2	2
4XG7A63481	B4HB	Intel Xeon Platinum 8260 24C 165W 2.4GHz Processor	2	2	2	2
4XG7A15886	B4P7	Intel Xeon Platinum 8260L 24C 165W 2.4GHz Processor	2	2	2	2
4XG7A37902	B4NU	Intel Xeon Platinum 8260Y 24/20/16C 165W 2.4GHz Processor	2	2	2	2
4XG7A15871	B4HA	Intel Xeon Platinum 8268 24C 205W 2.9GHz Processor	No	2	2	2
4XG7A15869	B4H9	Intel Xeon Platinum 8270 26C 205W 2.7GHz Processor	No	2	2	2
4XG7A15882	B4H8	Intel Xeon Platinum 8276 28C 165W 2.2GHz Processor	2	2	2	2
4XG7A15878	B4P6	Intel Xeon Platinum 8276L 28C 165W 2.2GHz Processor	2	2	2	2
4XG7A15867	B4H7	Intel Xeon Platinum 8280 28C 205W 2.7GHz Processor	No	2	2	2
4XG7A15863	B4P5	Intel Xeon Platinum 8280L 28C 205W 2.7GHz Processor	No	2	2	2

Memory

The VX2320, VX3320, VX7320-N, and 1U Certified Node systems support the following memory options.

For details about these options, including configuration rules, see the SR630 product guide:

<https://lenovopress.com/lp1049-thinksystem-sr630-server#memory-options>

Table 6. Memory options

Part number	Feature	Description	Maximum supported			
			VX2320	VX3320	VX7320-N	VX 1U
RDIMMs - 2933 MHz Performance+						
4X77A12184	B5N6	ThinkSystem 16GB TruDDR4 Performance+ 2933MHz (2Rx8 1.2V) RDIMM	24	24	24	24
4X77A12185	B5N7	ThinkSystem 32GB TruDDR4 Performance+ 2933MHz (2Rx4 1.2V) RDIMM	24	24	24	24
4X77A12186	B5N8	ThinkSystem 64GB TruDDR4 Performance+ 2933MHz (2Rx4 1.2V) RDIMM	24	24	24	24
RDIMMs - 2933 MHz						
4ZC7A08706	B4H1	ThinkSystem 8GB TruDDR4 2933MHz (1Rx8 1.2V) RDIMM	24	24	24	24
4ZC7A08707	B4LY	ThinkSystem 16GB TruDDR4 2933 MHz (1Rx4 1.2V) RDIMM	24	24	24	24
4ZC7A08708	B4H2	ThinkSystem 16GB TruDDR4 2933MHz (2Rx8 1.2V) RDIMM	24	24	24	24
4ZC7A08709	B4H3	ThinkSystem 32GB TruDDR4 2933MHz (2Rx4 1.2V) RDIMM	24	24	24	24
4ZC7A08710	B4H4	ThinkSystem 64GB TruDDR4 2933MHz (2Rx4 1.2V) RDIMM	24	24	24	24
RDIMMs - 2666 MHz						
7X77A01302	AUNB	ThinkSystem 16GB TruDDR4 2666 MHz (1Rx4 1.2V) RDIMM	24	24	24	24
7X77A01303	AUNC	ThinkSystem 16GB TruDDR4 2666 MHz (2Rx8 1.2V) RDIMM	24	24	24	24
7X77A01304	AUND	ThinkSystem 32GB TruDDR4 2666 MHz (2Rx4 1.2V) RDIMM	24	24	24	24
3DS RDIMMs - 2933 MHz Performance+						
4X77A12187	B5N9	ThinkSystem 128GB TruDDR4 Performance+ 2933MHz (4Rx4 1.2V) 3DS RDIMM	24	24	24	24
3DS RDIMMs - 2933 MHz						
4ZC7A15113	B587	ThinkSystem 128GB TruDDR4 2933MHz (4Rx4 1.2V) 3DS RDIMM	No	No	No	24
3DS RDIMMs - 2666 MHz						
4ZC7A08716	AUW5	ThinkSystem 64GB TruDDR4 2666MHz (4Rx4, 1.2V) 3DS RDIMM	24	24	24	24

Persistent Memory

The VX2320, VX3320, VX7320-N, and 1U Certified Node systems support the following persistent memory options.

For details about these options, including configuration rules, see the SR630 product guide:

<https://lenovopress.com/lp1049-thinksystem-sr630-server#persistent-memory>

Table 7. Persistent memory options

Part number	Feature	Description	Maximum supported			
			VX2320	VX3320	VX7320-N	VX 1U
4ZC7A15110	B4LV	ThinkSystem 128GB TruDDR4 2666MHz (1.2V) Intel Optane DC Persistent Memory	No	No	No	12
4ZC7A15111	B4LW	ThinkSystem 256GB TruDDR4 2666MHz (1.2V) Intel Optane DC Persistent Memory	No	No	No	12
4ZC7A15112	B4LX	ThinkSystem 512GB TruDDR4 2666MHz (1.2V) Intel Optane DC Persistent Memory	No	No	No	12

Internal storage

Internal storage configurations of the VX2320, VX3320, VX7320-N, and 1U Certified Node are as follows. All drives are hot-swap and are accessible from the front or rear of the system:

- ThinkAgile VX2330 Appliance
 - Front drive bays: 4x 3.5-inch SAS/SATA
 - Rear drive bays: None
- ThinkAgile VX3330 Appliance
 - Front drive bays: 6x 2.5-inch SAS/SATA & 4x 2.5-inch AnyBay
 - Rear drive bays: None
- ThinkAgile VX7330-N Appliance
 - Front drive bays: 10x 2.5-inch NVMe
 - Rear drive bays: None
- ThinkAgile VX3331 Certified Node
 - 4x 3.5" SAS/SATA (front) + 2x 2.5" SAS/SATA (rear)
 - 4x 3.5" AnyBay (front)
 - 6x 2.5" SAS/SATA & 4x 2.5" AnyBay (front) + 2x 2.5" SAS/SATA (rear)
 - 10x 2.5" NVMe (front)

The server also supports one or two M.2 drives for OS boot purposes, installed in an M.2 adapter internal to the server.

Ordering information is listed in the following table.

Table 8. Drive backplanes

Feature	Description	Maximum supported			
		VX2320	VX3320	VX7320-N	VX 1U
Front 3.5-inch drive backplanes					
AUW8	ThinkSystem 3.5" SATA/SAS 4-Bay Backplane (4x SAS/SATA)	1	No	No	1
B0WJ	ThinkSystem SR630 3.5" AnyBay 4-Bay Backplane (4x AnyBay)	No	No	No	1
Front 2.5-inch drive backplanes					
AUW9	ThinkSystem 1U 2.5" 4 AnyBay 10-Bay Backplane (6x SAS/SATA + 4x AnyBay)	No	1	No	1
AVKF	ThinkSystem SR630 2.5" U.2 10-Bay Backplane Kit (10x NVMe)	No	No	1	1
Rear 2.5-inch drive backplane					
AUWJ	ThinkSystem SR630 Rear HDD/SSD Kit (2x SAS/SATA)	No	No	No	1

For details about these components, including configuration rules, see the SR630 product guide: <https://lenovopress.com/lp1049-thinksystem-sr630-server#internal-storage>

The following figure shows the internal drive bay configurations.

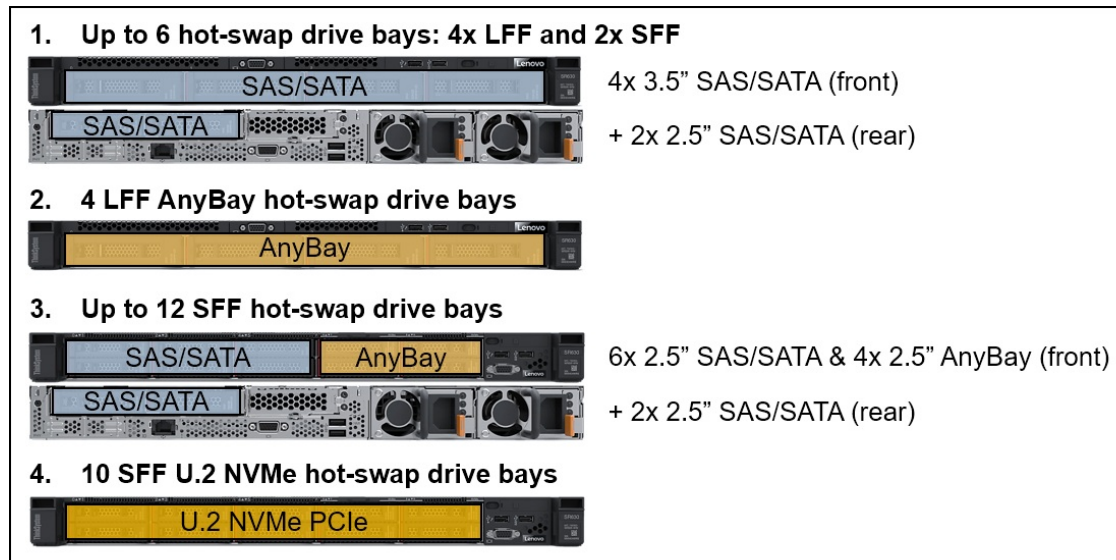


Figure 5. Internal drive bay configurations

Disk Groups

The following table lists the supported Disk Groups for each VX system.

Table 9. Disk Groups

Drive Selection Rules	VX2320 Appliance	VX3320 Appliance	VX7320-N Appliance	VX 1U Certified Node
Model Type	Hybrid (HY) All Flash (AF)	Hybrid (HY) All Flash (AF)	All Flash (AF)	Hybrid (HY) All Flash (AF)
Maximum number of drives	4	10	10	10
Number of Disk Groups	1	1 or 2	1 or 2	1 or 2
Number of Cache Drives per Disk Group	1	1	1	1
Number of Capacity Drives per Disk Group	2 - 3	2 - 7	2 - 7	2 - 7
Allowed Capacity Drive Quantities:				
1 Disk Group (1 Cache Drive)	2 or 3	2, 3, 4, 5, 6 or 7	2, 3, 4, 5, 6 or 7	2, 3, 4, 5, 6 or 7
2 Disk Groups (2 Cache Drives)	Not supported	4, 6 or 8	4, 6 or 8	4, 6 or 8

Controllers for internal storage

The VX2320, VX3320, VX7320-N, and 1U Certified Node systems support the following storage controller options.

Table 10. Controllers for internal storage

Part number	Feature	Description	Maximum supported			
			VX2320	VX3320	VX7320-N	VX 1U
12 Gb SAS/SATA non-RAID HBAs						
7Y37A01088	AUNL	ThinkSystem 430-8i SAS/SATA 12Gb HBA	1	No	No	1
7Y37A01089	AUNM	ThinkSystem 430-16i SAS/SATA 12Gb HBA	No	1	No	1
NVMe PCIe interfaces (non-RAID)						
7Y37A01081	AUV2	ThinkSystem 1610-4P NVMe Switch Adapter	No	No	2	2
4Y37A09719	B22D	ThinkSystem 810-4P NVMe Switch Adapter	No	No	2	2

Internal drive options

This section lists the supported drives:

- [Boot drives](#)
- [Internal drives for VX2320](#)
- [Internal drives for VX3320](#)
- [Internal drives for VX7320-N](#)
- [Internal drives for VX 1U Certified Node](#)

Boot drives

The VX2320, VX3320, VX7320-N, and 1U Certified Node systems support the following drive for boot functions.

Table 11. Boot drives

Part number	Feature	Description	Maximum supported			
			VX2320	VX3320	VX7320-N	VX 1U
4XB7A17071	B8HS	ThinkSystem M.2 5300 240GB SATA 6Gbps Non-Hot Swap SSD	No	No	No	2
4XB7A17073	B919	ThinkSystem M.2 5300 480GB SATA 6Gbps Non-Hot Swap SSD	2	2	2	2

Internal drives for VX2320 Appliance

The following table lists the drives support in the VX2320 Appliance. For both All Flash Storage and Hybrid Storage configurations, drives are classified as either Cache drives, Capacity drives, or both.

Table 12. Drives supported in the VX2320 Appliance

Part number	Feature	Description	All Flash Storage		Hybrid Storage	
			Cache	Capacity	Cache	Capacity
3.5-inch hot-swap 12 Gb SAS HDDs						
7XB7A00041	AUU4	ThinkSystem 3.5" 1TB 7.2K SAS 12Gb Hot Swap 512n HDD	No	No	No	4
7XB7A00042	AUU5	ThinkSystem 3.5" 2TB 7.2K SAS 12Gb Hot Swap 512n HDD	No	No	No	4
7XB7A00043	AUU6	ThinkSystem 3.5" 4TB 7.2K SAS 12Gb Hot Swap 512n HDD	No	No	No	4
7XB7A00044	AUU7	ThinkSystem 3.5" 6TB 7.2K SAS 12Gb Hot Swap 512e HDD	No	No	No	4
7XB7A00045	B0YR	ThinkSystem 3.5" 8TB 7.2K SAS 12Gb Hot Swap 512e HDD	No	No	No	4
3.5-inch hot-swap 12 Gb SAS SSDs						
4XB7A70011	BG03	ThinkSystem 3.5" Nytro 3732 400GB Performance SAS 12Gb Hot Swap SSD	4	4	4	No
4XB7A70010	BG02	ThinkSystem 3.5" Nytro 3732 800GB Performance SAS 12Gb Hot Swap SSD	4	4	4	No
4XB7A70009	BG01	ThinkSystem 3.5" Nytro 3732 1.6TB Performance SAS 12Gb Hot Swap SSD	4	4	4	No
4XB7A70008	BG00	ThinkSystem 3.5" Nytro 3732 3.2TB Performance SAS 12Gb Hot Swap SSD	4	4	4	No
4XB7A10234	B4Y8	ThinkSystem 3.5" SS530 800GB Performance SAS 12Gb Hot Swap SSD	4	4	4	No
4XB7A10236	B4YA	ThinkSystem 3.5" SS530 3.2TB Performance SAS 12Gb Hot Swap SSD	4	4	4	No
4XB7A17066	B8HT	ThinkSystem 3.5" PM1645a 800GB Mainstream SAS 12Gb Hot Swap SSD	8	8	8	No
4XB7A17043	B8JN	ThinkSystem 3.5" PM1645a 1.6TB Mainstream SAS 12Gb Hot Swap SSD	8	8	8	No
4XB7A17067	B8JK	ThinkSystem 3.5" PM1645a 3.2TB Mainstream SAS 12Gb Hot Swap SSD	8	8	8	No

Part number	Feature	Description	All Flash Storage		Hybrid Storage	
			Cache	Capacity	Cache	Capacity
4XB7A13659	B4A5	ThinkSystem 3.5" PM1645 3.2TB Mainstream SAS 12Gb Hot Swap SSD	4	4	4	No
4XB7A17058	B91E	ThinkSystem 3.5" PM1643a 3.84TB Entry SAS 12Gb Hot Swap SSD	8	8	8	No
3.5-inch hot-swap 6 Gb SATA SSDs						
4XB7A17137	BA4W	ThinkSystem 3.5" S4620 480GB Mixed Use SATA 6Gb HS SSD	4	4	4	No
4XB7A17138	BA4X	ThinkSystem 3.5" S4620 960GB Mixed Use SATA 6Gb HS SSD	4	4	4	No
4XB7A17139	BA4Y	ThinkSystem 3.5" S4620 1.92TB Mixed Use SATA 6Gb HS SSD	4	4	4	No
4XB7A17140	BK7P	ThinkSystem 3.5" S4620 3.84TB Mixed Use SATA 6Gb HS SSD	4	4	4	No
4XB7A17097	B8JF	ThinkSystem 3.5" 5300 480GB Mainstream SATA 6Gb Hot Swap SSD	8	8	8	No
4XB7A17098	B8J0	ThinkSystem 3.5" 5300 960GB Mainstream SATA 6Gb Hot Swap SSD	8	8	8	No
4XB7A17099	B8HR	ThinkSystem 3.5" 5300 1.92TB Mainstream SATA 6Gb Hot Swap SSD	8	8	8	No
4XB7A17100	B8HX	ThinkSystem 3.5" 5300 3.84TB Mainstream SATA 6Gb Hot Swap SSD	8	8	8	No
4XB7A13640	B49S	ThinkSystem 3.5" S4610 480GB Mixed Use SATA 6Gb HS SSD	No	4	4	No
4XB7A13641	B49T	ThinkSystem 3.5" S4610 960GB Mixed Use SATA 6Gb HS SSD	4	4	4	No
4XB7A13642	B49U	ThinkSystem 3.5" S4610 1.92TB Mixed Use SATA 6Gb HS SSD	4	4	4	No
4XB7A13643	B49V	ThinkSystem 3.5" S4610 3.84TB Mixed Use SATA 6Gb HS SSD	4	4	4	No
4XB7A17119	BA7L	ThinkSystem 3.5" S4520 480GB Read Intensive SATA 6Gb HS SSD	No	4	4	No
4XB7A17120	BA7M	ThinkSystem 3.5" S4520 960GB Read Intensive SATA 6Gb HS SSD	4	4	4	No
4XB7A17121	BA7N	ThinkSystem 3.5" S4520 1.92TB Read Intensive SATA 6Gb HS SSD	4	4	4	No
4XB7A17122	BK7F	ThinkSystem 3.5" S4520 3.84TB Read Intensive SATA 6Gb HS SSD	4	4	4	No
4XB7A17123	BK7G	ThinkSystem 3.5" S4520 7.68TB Read Intensive SATA 6Gb HS SSD	4	4	4	No
4XB7A17083	B8JC	ThinkSystem 3.5" 5300 960GB Entry SATA 6Gb Hot Swap SSD	No	8	8	No
4XB7A17084	B8HZ	ThinkSystem 3.5" 5300 1.92TB Entry SATA 6Gb Hot Swap SSD	8	8	8	No
4XB7A17085	B8HQ	ThinkSystem 3.5" 5300 3.84TB Entry SATA 6Gb Hot Swap SSD	8	8	8	No

Part number	Feature	Description	All Flash Storage		Hybrid Storage	
			Cache	Capacity	Cache	Capacity
4XB7A13627	B49F	ThinkSystem 3.5" S4510 960GB Read Intensive SATA 6Gb HS SSD	No	4	4	No
4XB7A13628	B49G	ThinkSystem 3.5" S4510 1.92TB Read Intensive SATA 6Gb HS SSD	No	4	4	No
4XB7A13629	B49H	ThinkSystem 3.5" S4510 3.84TB Read Intensive SATA 6Gb HS SSD	No	4	4	No

Internal drives for VX3320 Appliance

The following table lists the drives support in the VX3320 Appliance. For both All Flash Storage and Hybrid Storage configurations, drives are classified as either Cache drives, Capacity drives, or both.

Table 13. Drives supported in the VX3320 Appliance

Part number	Feature	Description	All Flash Storage		Hybrid Storage	
			Cache	Capacity	Cache	Capacity
2.5-inch hot-swap 12 Gb SAS HDDs						
7XB7A00026	AUM0	ThinkSystem 2.5" 900GB 10K SAS 12Gb Hot Swap 512n HDD	No	No	No	12
7XB7A00027	AUM1	ThinkSystem 2.5" 1.2TB 10K SAS 12Gb Hot Swap 512n HDD	No	No	No	12
7XB7A00028	AUM2	ThinkSystem 2.5" 1.8TB 10K SAS 12Gb Hot Swap 512e HDD	No	No	No	12
7XB7A00069	B0YS	ThinkSystem 2.5" 2.4TB 10K SAS 12Gb Hot Swap 512e HDD	No	No	No	12
7XB7A00023	AULX	ThinkSystem 2.5" 900GB 15K SAS 12Gb Hot Swap 512e HDD	No	No	No	12
7XB7A00034	AUM6	ThinkSystem 2.5" 1TB 7.2K SAS 12Gb Hot Swap 512n HDD	No	No	No	12
7XB7A00035	AUM7	ThinkSystem 2.5" 2TB 7.2K SAS 12Gb Hot Swap 512n HDD	No	No	No	12
2.5-inch hot-swap 12 Gb SAS SSDs						
4XB7A70006	BG07	ThinkSystem 2.5" Nytro 3732 400GB Performance SAS 12Gb Hot Swap SSD	12	12	12	No
4XB7A70005	BG06	ThinkSystem 2.5" Nytro 3732 800GB Performance SAS 12Gb Hot Swap SSD	12	12	12	No
4XB7A70004	BG05	ThinkSystem 2.5" Nytro 3732 1.6TB Performance SAS 12Gb Hot Swap SSD	12	12	12	No
4XB7A70003	BG04	ThinkSystem 2.5" Nytro 3732 3.2TB Performance SAS 12Gb Hot Swap SSD	12	12	12	No
4XB7A10219	B4Y4	ThinkSystem 2.5" SS530 400GB Performance SAS 12Gb Hot Swap SSD	12	12	12	No
4XB7A10230	B4Y5	ThinkSystem 2.5" SS530 800GB Performance SAS 12Gb Hot Swap SSD	12	12	12	No

Part number	Feature	Description	All Flash Storage		Hybrid Storage	
			Cache	Capacity	Cache	Capacity
4XB7A10232	B4Y7	ThinkSystem 2.5" SS530 3.2TB Performance SAS 12Gb Hot Swap SSD	12	12	12	No
4XB7A17062	B8HU	ThinkSystem 2.5" PM1645a 800GB Mainstream SAS 12Gb Hot Swap SSD	12	12	12	No
4XB7A17063	B8J4	ThinkSystem 2.5" PM1645a 1.6TB Mainstream SAS 12Gb Hot Swap SSD	12	12	12	No
4XB7A17064	B8JD	ThinkSystem 2.5" PM1645a 3.2TB Mainstream SAS 12Gb Hot Swap SSD	12	12	12	No
4XB7A38175	B91A	ThinkSystem 2.5" PM1643a 960GB Entry SAS 12Gb Hot Swap SSD	No	12	No	No
4XB7A38176	B91B	ThinkSystem 2.5" PM1643a 1.92TB Entry SAS 12Gb Hot Swap SSD	No	12	12	No
4XB7A17054	B91C	ThinkSystem 2.5" PM1643a 3.84TB Entry SAS 12Gb Hot Swap SSD	12	12	12	No
4XB7A17055	B91D	ThinkSystem 2.5" PM1643a 7.68TB Entry SAS 12Gb Hot Swap SSD	12	12	12	No
2.5-inch hot-swap 6 Gb SATA SSDs						
4XB7A17125	BA7Q	ThinkSystem 2.5" S4620 480GB Mixed Use SATA 6Gb HS SSD	12	12	12	No
4XB7A17126	BA4T	ThinkSystem 2.5" S4620 960GB Mixed Use SATA 6Gb HS SSD	12	12	12	No
4XB7A17127	BA4U	ThinkSystem 2.5" S4620 1.92TB Mixed Use SATA 6Gb HS SSD	12	12	12	No
4XB7A17128	BK7L	ThinkSystem 2.5" S4620 3.84TB Mixed Use SATA 6Gb HS SSD	12	12	12	No
4XB7A17088	B8HY	ThinkSystem 2.5" 5300 480GB Mainstream SATA 6Gb Hot Swap SSD	12	12	12	No
4XB7A17089	B8J6	ThinkSystem 2.5" 5300 960GB Mainstream SATA 6Gb Hot Swap SSD	12	12	12	No
4XB7A17090	B8JE	ThinkSystem 2.5" 5300 1.92TB Mainstream SATA 6Gb Hot Swap SSD	12	12	12	No
4XB7A17091	B8J7	ThinkSystem 2.5" 5300 3.84TB Mainstream SATA 6Gb Hot Swap SSD	12	12	12	No
4XB7A13634	B49M	ThinkSystem 2.5" S4610 480GB Mixed Use SATA 6Gb HS SSD	No	12	12	No
4XB7A13635	B49N	ThinkSystem 2.5" S4610 960GB Mixed Use SATA 6Gb HS SSD	12	12	12	No
4XB7A13636	B49P	ThinkSystem 2.5" S4610 1.92TB Mixed Use SATA 6Gb HS SSD	12	12	12	No
4XB7A13637	B49Q	ThinkSystem 2.5" S4610 3.84TB Mixed Use SATA 6Gb HS SSD	12	12	12	No
4XB7A17101	BA7G	ThinkSystem 2.5" S4520 480GB Read Intensive SATA 6Gb HS SSD	No	12	12	No
4XB7A17102	BA7H	ThinkSystem 2.5" S4520 960GB Read Intensive SATA 6Gb HS SSD	12	12	12	No

Part number	Feature	Description	All Flash Storage		Hybrid Storage	
			Cache	Capacity	Cache	Capacity
4XB7A17103	BA7J	ThinkSystem 2.5" S4520 1.92TB Read Intensive SATA 6Gb HS SSD	12	12	12	No
4XB7A17104	BK77	ThinkSystem 2.5" S4520 3.84TB Read Intensive SATA 6Gb HS SSD	12	12	12	No
4XB7A17105	BK78	ThinkSystem 2.5" S4520 7.68TB Read Intensive SATA 6Gb HS SSD	12	12	12	No
4XB7A17076	B8JM	ThinkSystem 2.5" 5300 480GB Entry SATA 6Gb Hot Swap SSD	No	12	No	No
4XB7A17077	B8HP	ThinkSystem 2.5" 5300 960GB Entry SATA 6Gb Hot Swap SSD	No	12	12	No
4XB7A17078	B8J5	ThinkSystem 2.5" 5300 1.92TB Entry SATA 6Gb Hot Swap SSD	12	12	12	No
4XB7A17079	B8JP	ThinkSystem 2.5" 5300 3.84TB Entry SATA 6Gb Hot Swap SSD	12	12	12	No
4XB7A17080	B8J2	ThinkSystem 2.5" 5300 7.68TB Entry SATA 6Gb Hot Swap SSD	No	12	No	No
4XB7A10248	B499	ThinkSystem 2.5" S4510 480GB Read Intensive SATA 6Gb HS SSD	No	12	No	No
4XB7A10249	B49A	ThinkSystem 2.5" S4510 960GB Read Intensive SATA 6Gb HS SSD	No	12	12	No
4XB7A13622	B49B	ThinkSystem 2.5" S4510 1.92TB Read Intensive SATA 6Gb HS SSD	No	12	12	No
4XB7A13623	B49C	ThinkSystem 2.5" S4510 3.84TB Read Intensive SATA 6Gb HS SSD	No	12	12	No
4XB7A10196	B34J	ThinkSystem 2.5" PM883 480GB Entry SATA 6Gb Hot Swap SSD	No	12	No	No
4XB7A10197	B34K	ThinkSystem 2.5" PM883 960GB Entry SATA 6Gb Hot Swap SSD	No	12	No	No
4XB7A10198	B34L	ThinkSystem 2.5" PM883 1.92TB Entry SATA 6Gb Hot Swap SSD	No	12	12	No
4XB7A10199	B34M	ThinkSystem 2.5" PM883 3.84TB Entry SATA 6Gb Hot Swap SSD	12	12	12	No
4XB7A10200	B4D2	ThinkSystem 2.5" PM883 7.68TB Entry SATA 6Gb Hot Swap SSD	12	12	12	No
2.5-inch hot-swap PCIe 4.0 NVMe SSDs						
4XB7A17152	BCFV	ThinkSystem 2.5" U.2 P5600 1.6TB Mixed Use NVMe PCIe 4.0 x4 HS SSD	10	10	No	No
4XB7A17153	BCFR	ThinkSystem 2.5" U.2 P5600 3.2TB Mixed Use NVMe PCIe 4.0 x4 HS SSD	10	10	No	No
4XB7A17154	BCFS	ThinkSystem 2.5" U.2 P5600 6.4TB Mixed Use NVMe PCIe 4.0 x4 HS SSD	10	10	No	No
2.5-inch hot-swap PCIe 3.0 NVMe SSDs						
7N47A00081	AUMJ	ThinkSystem 2.5" U.2 P4800X 375GB Write Intensive NVMe PCIe 3.0 x4 HS SSD	10	10	No	No

Part number	Feature	Description	All Flash Storage		Hybrid Storage	
			Cache	Capacity	Cache	Capacity
7N47A00083	B2ZJ	ThinkSystem 2.5" U.2 P4800X 750GB Write Intensive NVMe PCIe 3.0 x4 HS SSD	10	10	No	No
4XB7A10204	B58G	ThinkSystem 2.5" U.2 P4510 2.0TB Read Intensive NVMe PCIe 3.0 x4 HS SSD	No	10	No	No

Internal drives for VX7320-N Appliance

The following table lists the drives support in the VX7320-N Appliance. The VX7320-N Appliance only supports an All Flash Storage configuration, and drives are classified as either Cache drives, Capacity drives, or both.

Table 14. Drives supported in the VX7320-N Appliance

Part number	Feature	Description	All Flash Storage	
			Cache	Capacity
2.5-inch hot-swap PCIe 4.0 NVMe SSDs				
4XB7A17152	BCFV	ThinkSystem 2.5" U.2 P5600 1.6TB Mixed Use NVMe PCIe 4.0 x4 HS SSD	10	10
4XB7A17153	BCFR	ThinkSystem 2.5" U.2 P5600 3.2TB Mixed Use NVMe PCIe 4.0 x4 HS SSD	10	10
4XB7A17154	BCFS	ThinkSystem 2.5" U.2 P5600 6.4TB Mixed Use NVMe PCIe 4.0 x4 HS SSD	10	10
4XB7A17145	BCFT	ThinkSystem 2.5" U.2 P5500 1.92TB Read Intensive NVMe PCIe 4.0 x4 HS SSD	No	10
4XB7A17146	BCFW	ThinkSystem 2.5" U.2 P5500 3.84TB Read Intensive NVMe PCIe 4.0 x4 HS SSD	No	10
4XB7A17147	BCFU	ThinkSystem 2.5" U.2 P5500 7.68TB Read Intensive NVMe PCIe 4.0 x4 HS SSD	No	10
2.5-inch hot-swap PCIe 3.0 NVMe SSDs				
7N47A00081	AUMJ	ThinkSystem 2.5" U.2 P4800X 375GB Write Intensive NVMe PCIe 3.0 x4 HS SSD	10	10
7N47A00083	B2ZJ	ThinkSystem 2.5" U.2 P4800X 750GB Write Intensive NVMe PCIe 3.0 x4 HS SSD	10	10
4XB7A10204	B58G	ThinkSystem 2.5" U.2 P4510 2.0TB Read Intensive NVMe PCIe 3.0 x4 HS SSD	No	10

Internal drives for VX 1U Certified Node

The following table lists the drives support in the VX 1U Certified Node. For both All Flash Storage and Hybrid Storage configurations, drives are classified as either Cache drives, Capacity drives, or both.

Table 15. Drives supported in the VX 1U Certified Node

Part number	Feature	Description	All Flash Storage		Hybrid Storage	
			Cache	Capacity	Cache	Capacity

Part number	Feature	Description	All Flash Storage		Hybrid Storage	
			Cache	Capacity	Cache	Capacity
2.5-inch hot-swap 12 Gb SAS HDDs						
7XB7A00026	AUM0	ThinkSystem 2.5" 900GB 10K SAS 12Gb Hot Swap 512n HDD	No	No	No	12
7XB7A00027	AUM1	ThinkSystem 2.5" 1.2TB 10K SAS 12Gb Hot Swap 512n HDD	No	No	No	12
7XB7A00028	AUM2	ThinkSystem 2.5" 1.8TB 10K SAS 12Gb Hot Swap 512e HDD	No	No	No	12
7XB7A00069	B0YS	ThinkSystem 2.5" 2.4TB 10K SAS 12Gb Hot Swap 512e HDD	No	No	No	12
7XB7A00023	AULX	ThinkSystem 2.5" 900GB 15K SAS 12Gb Hot Swap 512e HDD	No	No	No	12
7XB7A00034	AUM6	ThinkSystem 2.5" 1TB 7.2K SAS 12Gb Hot Swap 512n HDD	No	No	No	12
7XB7A00035	AUM7	ThinkSystem 2.5" 2TB 7.2K SAS 12Gb Hot Swap 512n HDD	No	No	No	12
2.5-inch hot-swap 12 Gb SAS SSDs						
4XB7A70006	BG07	ThinkSystem 2.5" Nytro 3732 400GB Performance SAS 12Gb Hot Swap SSD	12	12	12	No
4XB7A70005	BG06	ThinkSystem 2.5" Nytro 3732 800GB Performance SAS 12Gb Hot Swap SSD	12	12	12	No
4XB7A70004	BG05	ThinkSystem 2.5" Nytro 3732 1.6TB Performance SAS 12Gb Hot Swap SSD	12	12	12	No
4XB7A70003	BG04	ThinkSystem 2.5" Nytro 3732 3.2TB Performance SAS 12Gb Hot Swap SSD	12	12	12	No
4XB7A10219	B4Y4	ThinkSystem 2.5" SS530 400GB Performance SAS 12Gb Hot Swap SSD	12	12	12	No
4XB7A10230	B4Y5	ThinkSystem 2.5" SS530 800GB Performance SAS 12Gb Hot Swap SSD	12	12	12	No
4XB7A10232	B4Y7	ThinkSystem 2.5" SS530 3.2TB Performance SAS 12Gb Hot Swap SSD	12	12	12	No
4XB7A17062	B8HU	ThinkSystem 2.5" PM1645a 800GB Mainstream SAS 12Gb Hot Swap SSD	12	12	12	No
4XB7A17063	B8J4	ThinkSystem 2.5" PM1645a 1.6TB Mainstream SAS 12Gb Hot Swap SSD	12	12	12	No
4XB7A17064	B8JD	ThinkSystem 2.5" PM1645a 3.2TB Mainstream SAS 12Gb Hot Swap SSD	12	12	12	No
4XB7A38175	B91A	ThinkSystem 2.5" PM1643a 960GB Entry SAS 12Gb Hot Swap SSD	No	12	No	No
4XB7A38176	B91B	ThinkSystem 2.5" PM1643a 1.92TB Entry SAS 12Gb Hot Swap SSD	No	12	12	No
4XB7A17054	B91C	ThinkSystem 2.5" PM1643a 3.84TB Entry SAS 12Gb Hot Swap SSD	12	12	12	No
4XB7A17055	B91D	ThinkSystem 2.5" PM1643a 7.68TB Entry SAS 12Gb Hot Swap SSD	12	12	12	No

Part number	Feature	Description	All Flash Storage		Hybrid Storage	
			Cache	Capacity	Cache	Capacity
4XB7A17056	BC4R	ThinkSystem 2.5" PM1643a 15.36TB Entry SAS 12Gb Hot Swap SSD	12	12	12	No
2.5-inch hot-swap 6 Gb SATA SSDs						
4XB7A17125	BA7Q	ThinkSystem 2.5" S4620 480GB Mixed Use SATA 6Gb HS SSD	12	12	12	No
4XB7A17126	BA4T	ThinkSystem 2.5" S4620 960GB Mixed Use SATA 6Gb HS SSD	12	12	12	No
4XB7A17127	BA4U	ThinkSystem 2.5" S4620 1.92TB Mixed Use SATA 6Gb HS SSD	12	12	12	No
4XB7A17128	BK7L	ThinkSystem 2.5" S4620 3.84TB Mixed Use SATA 6Gb HS SSD	12	12	12	No
4XB7A17088	B8HY	ThinkSystem 2.5" 5300 480GB Mainstream SATA 6Gb Hot Swap SSD	12	12	12	No
4XB7A17089	B8J6	ThinkSystem 2.5" 5300 960GB Mainstream SATA 6Gb Hot Swap SSD	12	12	12	No
4XB7A17090	B8JE	ThinkSystem 2.5" 5300 1.92TB Mainstream SATA 6Gb Hot Swap SSD	12	12	12	No
4XB7A17091	B8J7	ThinkSystem 2.5" 5300 3.84TB Mainstream SATA 6Gb Hot Swap SSD	12	12	12	No
4XB7A13634	B49M	ThinkSystem 2.5" S4610 480GB Mixed Use SATA 6Gb HS SSD	No	10	10	No
4XB7A13635	B49N	ThinkSystem 2.5" S4610 960GB Mixed Use SATA 6Gb HS SSD	10	10	10	No
4XB7A13636	B49P	ThinkSystem 2.5" S4610 1.92TB Mixed Use SATA 6Gb HS SSD	10	10	10	No
4XB7A13637	B49Q	ThinkSystem 2.5" S4610 3.84TB Mixed Use SATA 6Gb HS SSD	10	10	10	No
4XB7A10240	B48B	ThinkSystem 2.5" 5200 1.92TB Mainstream SATA 6Gb Hot Swap SSD	12	12	12	No
4XB7A17101	BA7G	ThinkSystem 2.5" S4520 480GB Read Intensive SATA 6Gb HS SSD	No	12	12	No
4XB7A17102	BA7H	ThinkSystem 2.5" S4520 960GB Read Intensive SATA 6Gb HS SSD	12	12	12	No
4XB7A17103	BA7J	ThinkSystem 2.5" S4520 1.92TB Read Intensive SATA 6Gb HS SSD	12	12	12	No
4XB7A17104	BK77	ThinkSystem 2.5" S4520 3.84TB Read Intensive SATA 6Gb HS SSD	12	12	12	No
4XB7A17105	BK78	ThinkSystem 2.5" S4520 7.68TB Read Intensive SATA 6Gb HS SSD	12	12	12	No
4XB7A17076	B8JM	ThinkSystem 2.5" 5300 480GB Entry SATA 6Gb Hot Swap SSD	No	12	No	No
4XB7A17077	B8HP	ThinkSystem 2.5" 5300 960GB Entry SATA 6Gb Hot Swap SSD	No	12	12	No
4XB7A17078	B8J5	ThinkSystem 2.5" 5300 1.92TB Entry SATA 6Gb Hot Swap SSD	12	12	12	No

Part number	Feature	Description	All Flash Storage		Hybrid Storage	
			Cache	Capacity	Cache	Capacity
4XB7A17079	B8JP	ThinkSystem 2.5" 5300 3.84TB Entry SATA 6Gb Hot Swap SSD	12	12	12	No
4XB7A17080	B8J2	ThinkSystem 2.5" 5300 7.68TB Entry SATA 6Gb Hot Swap SSD	No	12	No	No
4XB7A10248	B499	ThinkSystem 2.5" S4510 480GB Read Intensive SATA 6Gb HS SSD	No	10	No	No
4XB7A10249	B49A	ThinkSystem 2.5" S4510 960GB Read Intensive SATA 6Gb HS SSD	No	10	10	No
4XB7A13622	B49B	ThinkSystem 2.5" S4510 1.92TB Read Intensive SATA 6Gb HS SSD	No	10	10	No
4XB7A13623	B49C	ThinkSystem 2.5" S4510 3.84TB Read Intensive SATA 6Gb HS SSD	No	10	10	No
4XB7A10196	B34J	ThinkSystem 2.5" PM883 480GB Entry SATA 6Gb Hot Swap SSD	No	12	No	No
4XB7A10197	B34K	ThinkSystem 2.5" PM883 960GB Entry SATA 6Gb Hot Swap SSD	No	12	No	No
4XB7A10198	B34L	ThinkSystem 2.5" PM883 1.92TB Entry SATA 6Gb Hot Swap SSD	No	12	12	No
4XB7A10199	B34M	ThinkSystem 2.5" PM883 3.84TB Entry SATA 6Gb Hot Swap SSD	12	12	12	No
4XB7A10200	B4D2	ThinkSystem 2.5" PM883 7.68TB Entry SATA 6Gb Hot Swap SSD	12	12	12	No
2.5-inch hot-swap PCIe 4.0 NVMe SSDs						
4XB7A17152	BCFV	ThinkSystem 2.5" U.2 P5600 1.6TB Mixed Use NVMe PCIe 4.0 x4 HS SSD	10	10	No	No
4XB7A17153	BCFR	ThinkSystem 2.5" U.2 P5600 3.2TB Mixed Use NVMe PCIe 4.0 x4 HS SSD	10	10	No	No
4XB7A17154	BCFS	ThinkSystem 2.5" U.2 P5600 6.4TB Mixed Use NVMe PCIe 4.0 x4 HS SSD	10	10	No	No
4XB7A17145	BCFT	ThinkSystem 2.5" U.2 P5500 1.92TB Read Intensive NVMe PCIe 4.0 x4 HS SSD	No	10	No	No
4XB7A17146	BCFW	ThinkSystem 2.5" U.2 P5500 3.84TB Read Intensive NVMe PCIe 4.0 x4 HS SSD	No	10	No	No
4XB7A17147	BCFU	ThinkSystem 2.5" U.2 P5500 7.68TB Read Intensive NVMe PCIe 4.0 x4 HS SSD	No	10	No	No
2.5-inch hot-swap PCIe 3.0 NVMe SSDs						
7N47A00081	AUMJ	ThinkSystem 2.5" U.2 P4800X 375GB Write Intensive NVMe PCIe 3.0 x4 HS SSD	10	10	No	No
7N47A00083	B2ZJ	ThinkSystem 2.5" U.2 P4800X 750GB Write Intensive NVMe PCIe 3.0 x4 HS SSD	10	10	No	No
4XB7A10204	B58G	ThinkSystem 2.5" U.2 P4510 2.0TB Read Intensive NVMe PCIe 3.0 x4 HS SSD	No	10	No	No
3.5-inch hot-swap 12 Gb SAS HDDs						
7XB7A00041	AUU4	ThinkSystem 3.5" 1TB 7.2K SAS 12Gb Hot Swap 512n HDD	No	No	No	4

Part number	Feature	Description	All Flash Storage		Hybrid Storage	
			Cache	Capacity	Cache	Capacity
7XB7A00042	AUU5	ThinkSystem 3.5" 2TB 7.2K SAS 12Gb Hot Swap 512n HDD	No	No	No	4
7XB7A00043	AUU6	ThinkSystem 3.5" 4TB 7.2K SAS 12Gb Hot Swap 512n HDD	No	No	No	4
7XB7A00044	AUU7	ThinkSystem 3.5" 6TB 7.2K SAS 12Gb Hot Swap 512e HDD	No	No	No	4
7XB7A00045	B0YR	ThinkSystem 3.5" 8TB 7.2K SAS 12Gb Hot Swap 512e HDD	No	No	No	4
7XB7A00046	AUUG	ThinkSystem 3.5" 10TB 7.2K SAS 12Gb Hot Swap 512e HDD	No	No	No	4
7XB7A00067	B117	ThinkSystem 3.5" 12TB 7.2K SAS 12Gb Hot Swap 512e HDD	No	No	No	4
4XB7A13906	B496	ThinkSystem 3.5" 14TB 7.2K SAS 12Gb Hot Swap 512e HDD	No	No	No	12
4XB7A13911	B7EZ	ThinkSystem 3.5" 16TB 7.2K SAS 12Gb Hot Swap 512e HDD	No	No	No	8
3.5-inch hot-swap 12 Gb SAS SSDs						
4XB7A70011	BG03	ThinkSystem 3.5" Nytro 3732 400GB Performance SAS 12Gb Hot Swap SSD	4	4	4	No
4XB7A70010	BG02	ThinkSystem 3.5" Nytro 3732 800GB Performance SAS 12Gb Hot Swap SSD	4	4	4	No
4XB7A70009	BG01	ThinkSystem 3.5" Nytro 3732 1.6TB Performance SAS 12Gb Hot Swap SSD	4	4	4	No
4XB7A70008	BG00	ThinkSystem 3.5" Nytro 3732 3.2TB Performance SAS 12Gb Hot Swap SSD	4	4	4	No
4XB7A10234	B4Y8	ThinkSystem 3.5" SS530 800GB Performance SAS 12Gb Hot Swap SSD	4	4	4	No
4XB7A10236	B4YA	ThinkSystem 3.5" SS530 3.2TB Performance SAS 12Gb Hot Swap SSD	4	4	4	No
4XB7A17066	B8HT	ThinkSystem 3.5" PM1645a 800GB Mainstream SAS 12Gb Hot Swap SSD	8	8	8	No
4XB7A17043	B8JN	ThinkSystem 3.5" PM1645a 1.6TB Mainstream SAS 12Gb Hot Swap SSD	8	8	8	No
4XB7A17067	B8JK	ThinkSystem 3.5" PM1645a 3.2TB Mainstream SAS 12Gb Hot Swap SSD	8	8	8	No
4XB7A13659	B4A5	ThinkSystem 3.5" PM1645 3.2TB Mainstream SAS 12Gb Hot Swap SSD	4	4	4	No
4XB7A17058	B91E	ThinkSystem 3.5" PM1643a 3.84TB Entry SAS 12Gb Hot Swap SSD	8	8	8	No
3.5-inch hot-swap 6 Gb SATA SSDs						
4XB7A17097	B8JF	ThinkSystem 3.5" 5300 480GB Mainstream SATA 6Gb Hot Swap SSD	8	8	8	No
4XB7A17098	B8J0	ThinkSystem 3.5" 5300 960GB Mainstream SATA 6Gb Hot Swap SSD	8	8	8	No

Part number	Feature	Description	All Flash Storage		Hybrid Storage	
			Cache	Capacity	Cache	Capacity
4XB7A17099	B8HR	ThinkSystem 3.5" 5300 1.92TB Mainstream SATA 6Gb Hot Swap SSD	8	8	8	No
4XB7A17100	B8HX	ThinkSystem 3.5" 5300 3.84TB Mainstream SATA 6Gb Hot Swap SSD	8	8	8	No
4XB7A13640	B49S	ThinkSystem 3.5" S4610 480GB Mixed Use SATA 6Gb HS SSD	No	4	4	No
4XB7A13641	B49T	ThinkSystem 3.5" S4610 960GB Mixed Use SATA 6Gb HS SSD	4	4	4	No
4XB7A13642	B49U	ThinkSystem 3.5" S4610 1.92TB Mixed Use SATA 6Gb HS SSD	4	4	4	No
4XB7A13643	B49V	ThinkSystem 3.5" S4610 3.84TB Mixed Use SATA 6Gb HS SSD	4	4	4	No
4XB7A10245	B48G	ThinkSystem 3.5" 5200 1.92TB Mainstream SATA 6Gb Hot Swap SSD	4	4	4	No
4XB7A17081	B8JB	ThinkSystem 3.5" 5300 240GB Entry SATA 6Gb Hot Swap SSD	No	8	No	No
4XB7A17082	B8J9	ThinkSystem 3.5" 5300 480GB Entry SATA 6Gb Hot Swap SSD	No	8	No	No
4XB7A17083	B8JC	ThinkSystem 3.5" 5300 960GB Entry SATA 6Gb Hot Swap SSD	No	8	8	No
4XB7A17084	B8HZ	ThinkSystem 3.5" 5300 1.92TB Entry SATA 6Gb Hot Swap SSD	8	8	8	No
4XB7A17085	B8HQ	ThinkSystem 3.5" 5300 3.84TB Entry SATA 6Gb Hot Swap SSD	8	8	8	No
4XB7A17086	B8J3	ThinkSystem 3.5" 5300 7.68TB Entry SATA 6Gb Hot Swap SSD	No	8	No	No
4XB7A13626	B49E	ThinkSystem 3.5" S4510 480GB Read Intensive SATA 6Gb HS SSD	No	4	No	No
4XB7A13627	B49F	ThinkSystem 3.5" S4510 960GB Read Intensive SATA 6Gb HS SSD	No	4	4	No
4XB7A13628	B49G	ThinkSystem 3.5" S4510 1.92TB Read Intensive SATA 6Gb HS SSD	No	4	4	No
4XB7A13629	B49H	ThinkSystem 3.5" S4510 3.84TB Read Intensive SATA 6Gb HS SSD	No	4	4	No
3.5-inch hot-swap PCIe 4.0 NVMe SSDs						
4XB7A17155	BCFM	ThinkSystem 3.5" U.2 P5600 1.6TB Mixed Use NVMe PCIe 4.0 x4 HS SSD	4	4	No	No
4XB7A17156	BCFJ	ThinkSystem 3.5" U.2 P5600 3.2TB Mixed Use NVMe PCIe 4.0 x4 HS SSD	4	4	No	No
4XB7A17157	BCFQ	ThinkSystem 3.5" U.2 P5600 6.4TB Mixed Use NVMe PCIe 4.0 x4 HS SSD	4	4	No	No

Network adapters

The VX2320, VX3320, VX7320-N, and 1U Certified Node systems support the following networking options.

For details about these options, including configuration rules, see the SR630 product guide:

<https://lenovopress.com/lp1049-thinksystem-sr630-server#i-o-expansion>

<https://lenovopress.com/lp1049-thinksystem-sr630-server#network-adapters>

Table 16. LOM network adapters

Part number	Feature	Description	Maximum supported			
			VX2320	VX3320	VX7320-N	VX 1U
LOM cards - Gigabit Ethernet						
7ZT7A00544	AUKG	ThinkSystem 1Gb 2-port RJ45 LOM	1	No	No	1
7ZT7A00545	AUKH	ThinkSystem 1Gb 4-port RJ45 LOM	1	No	No	1
LOM cards - 10 Gb Ethernet						
7ZT7A00548	AUKL	ThinkSystem 10Gb 2-port Base-T LOM	1	1	1	1
7ZT7A00546	AUKJ	ThinkSystem 10Gb 2-port SFP+ LOM	1	1	1	1
7ZT7A00549	AUKM	ThinkSystem 10Gb 4-port Base-T LOM	1	1	1	1
7ZT7A00547	AUKK	ThinkSystem 10Gb 4-port SFP+ LOM	1	1	1	1

Table 17. PCIe network adapters

Part number	Feature	Description	Maximum supported			
			VX2320	VX3320	VX7320-N	VX 1U
ML2 adapters - 10 Gb Ethernet						
01CV770	AU7Z	Emulex VFA5.2 ML2 2x10 GbE SFP+ Adapter and FCoE/iSCSI SW	No	No	No	1
00JY940	ATRH	Intel X710-DA2 ML2 2x10GbE SFP+ Adapter	No	No	No	1
ML2 adapters - 25 Gb Ethernet						
00MN990	ATZR	Mellanox ConnectX-4 Lx 10/25GbE SFP28 1-port ML2 Adapter	No	No	No	3
7ZT7A00507	AUKU	ThinkSystem Mellanox ConnectX-4 Lx 10/25GbE SFP28 2-Port ML2 Ethernet Adapter	No	No	No	3
PCIe Low Profile adapters - 1 Gb Ethernet						
7ZT7A00482	AUZX	ThinkSystem Broadcom 5720 1GbE RJ45 2-Port PCIe Ethernet Adapter	No	No	No	3
7ZT7A00484	AUZV	ThinkSystem Broadcom 5719 1GbE RJ45 4-Port PCIe Ethernet Adapter	No	No	No	3
7ZT7A00534	AUZY	ThinkSystem I350-T2 PCIe 1Gb 2-Port RJ45 Ethernet Adapter	No	No	No	3
7ZT7A00535	AUZW	ThinkSystem I350-T4 PCIe 1Gb 4-Port RJ45 Ethernet Adapter	No	No	No	3
PCIe Low Profile adapters - 10 Gb Ethernet						
7ZT7A00496	AUKP	ThinkSystem Broadcom 57416 10GBASE-T 2-Port PCIe Ethernet Adapter	No	No	No	3
00AG570	AT7S	Emulex VFA5.2 2x10 GbE SFP+ PCIe Adapter	3	3	3	3
00MM860	ATPX	Intel X550-T2 Dual Port 10GBase-T Adapter	3	3	3	3

Part number	Feature	Description	Maximum supported			
			VX2320	VX3320	VX7320-N	VX 1U
7ZT7A00537	AUKX	ThinkSystem Intel X710-DA2 PCIe 10Gb 2-Port SFP+ Ethernet Adapter	3	3	3	3
PCIe Full Height adapters - 10 Gb Ethernet						
7ZT7A00493	AUKN	ThinkSystem Emulex OCe14104B-NX PCIe 10Gb 4-Port SFP+ Ethernet Adapter	No	No	No	1
PCIe Low Profile adapters - 25 Gb Ethernet						
7ZT7A00505	AUKS	ThinkSystem Broadcom 57412 25GbE SFP28 1-Port PCIe Ethernet Adapter	3	3	3	3
4XC7A08238	B5T0	ThinkSystem Broadcom 57414 10/25GbE SFP28 2-port PCIe Ethernet Adapter	3	3	3	3
4XC7A08316	BD49	ThinkSystem Broadcom 57454 10/25GbE SFP28 4-port PCIe Ethernet Adapter V2	1	1	1	1
7XC7A05523	B0WY	ThinkSystem Intel XXV710-DA2 10/25GbE SFP28 2-Port PCIe Ethernet Adapter	3	3	3	3
01GR250	AUAJ	Mellanox ConnectX-4 Lx 10/25GbE SFP28 2-port PCIe Ethernet Adapter	3	3	3	3
4XC7A62580	BE4U	ThinkSystem Mellanox ConnectX-6 Lx 10/25GbE SFP28 2-Port PCIe Ethernet Adapter	3	3	No	3
4XC7A08228	B21R	ThinkSystem QLogic QL41262 10/25GbE SFP28 2-Port PCIe Ethernet Adapter	No	No	No	3
PCIe Low Profile adapters - 40 Gb Ethernet						
00MM950	ATRN	Mellanox ConnectX-4 Lx 1x40GbE QSFP+ Adapter	No	No	No	3
4XC7A08229	B31C	ThinkSystem Mellanox ConnectX-5 Ex 25/40GbE 2-port Low-Latency Adapter	No	No	No	2
PCIe x16 Low Profile adapters - 100 Gb Ethernet						
00MM960	ATRP	Mellanox ConnectX-4 2x100GbE/EDR IB QSFP28 VPI Adapter	No	No	No	3
4XC7A08248	B8PP	ThinkSystem Mellanox ConnectX-6 Dx 100GbE QSFP56 2-port PCIe Ethernet Adapter	2	2	No	2
4C57A14177	B4R9	ThinkSystem Mellanox ConnectX-6 HDR100/100GbE QSFP56 1-port PCIe VPI Adapter	2	2	No	2
4C57A14178	B4RA	ThinkSystem Mellanox ConnectX-6 HDR100/100GbE QSFP56 2-port PCIe VPI Adapter	2	2	No	2
PCIe x16 Low Profile adapters - 200 Gb Ethernet						
4C57A15326	B4RC	ThinkSystem Mellanox ConnectX-6 HDR/200GbE QSFP56 1-port PCIe 4 VPI Adapter	No	1	1	1

GPU adapters

The VX2320, VX3320, VX7320-N, and 1U Certified Node systems support the following GPU options.

For details about these options, including configuration rules, see the SR630 product guide:

<https://lenovopress.com/lp1049-thinksystem-sr630-server#gpu-adapters>

Table 18. GPU adapters

Part number	Feature	Description	Maximum supported			
			VX2320	VX3320	VX7320-N	VX 1U
4X67A11584	B31D	ThinkSystem NVIDIA Quadro P620 2GB PCIe Active GPU	No	No	No	3
4X67A14926	B4YB	ThinkSystem NVIDIA T4 16GB PCIe Passive GPU	No	No	No	2

Operating system support

The VX2320 Appliance supports the following operating systems:

- VMware ESXi 6.5 U2
- VMware ESXi 6.5 U3
- VMware ESXi 6.7 U1
- VMware ESXi 6.7 U2
- VMware ESXi 6.7 U3
- VMware ESXi 7.0
- VMware ESXi 7.0 U1
- VMware ESXi 7.0 U2
- VMware ESXi 7.0 U3

The VX3320 Appliance supports the following operating systems:

- VMware ESXi 6.5 U2
- VMware ESXi 6.5 U3
- VMware ESXi 6.7 U1
- VMware ESXi 6.7 U2
- VMware ESXi 6.7 U3
- VMware ESXi 7.0
- VMware ESXi 7.0 U1
- VMware ESXi 7.0 U2
- VMware ESXi 7.0 U3

The VX7320-N Appliance supports the following operating systems:

- VMware ESXi 6.5 U2
- VMware ESXi 6.5 U3
- VMware ESXi 6.7 U1
- VMware ESXi 6.7 U2
- VMware ESXi 6.7 U3
- VMware ESXi 7.0
- VMware ESXi 7.0 U1
- VMware ESXi 7.0 U2
- VMware ESXi 7.0 U3

The VX 1U Certified Node supports the following operating systems:

- VMware ESXi 6.5 U2
- VMware ESXi 6.5 U3

- VMware ESXi 6.7 U1
- VMware ESXi 6.7 U2
- VMware ESXi 6.7 U3
- VMware ESXi 7.0
- VMware ESXi 7.0 U1
- VMware ESXi 7.0 U2
- VMware ESXi 7.0 U3

For further details, including any restrictions, see the OS Interoperability Guide:

<https://lenovopress.com/osig#term=vx%2520purley%25201u%2520%2522gen%25202%2522&support=all>

Software

VMware vSAN, vSphere, and vCenter Server software are required for ThinkAgile VX Series Appliances (Integrated Systems) and Certified Nodes. For Appliances/Integrated Systems, you are required to purchase VMware vSAN licenses for VX Series from Lenovo. For Certified Nodes, you can purchase the vSAN licenses from Lenovo or from VMware, or you can use your existing licenses. For vSphere and vCenter Server, you can use the existing VMware software licenses and active support contracts, or you can purchase software licenses and support from Lenovo or VMware.

Lenovo offers the following VMware software license and support options for ThinkAgile VX Series systems:

- VMware vSAN License and Subscription
- VMware vSphere License and Subscription
- VMware HCI Kit License and Subscription
- VMware Horizon License and Subscription
- VMware Cloud Foundation License and Subscription
- VMware vCenter Server License and Subscription

For details and ordering information, see the VMware Software Solution Product Guide:

<https://lenovopress.com/lp1265-vmware-software-solution-product-guide>

Configuration notes:

- The selection of vSAN licenses is required: Standalone licenses, HCI bundle licenses, VDI solution licenses, or VCF licenses.
- VMware software licenses that are available for selection include 1-year, 3-year, or 5-year software support (matches the duration of the selected solution-level warranty period).
- The quantity of processor-based licenses is derived by the configuration tool based on the number of processors selected.
- The quantity of VM-based licenses is specified based on VM requirements.
- The quantity of CCU-based licenses is specified based on the concurrent user requirements.

Warranty and Support

The VX2320, VX3320, VX7320-N, and 1U Certified Node have a 3-year warranty based on the machine type:

- 7Y93 - 3 year warranty

The ThinkAgile VX Series Appliances can be configured with a three- or five-year hardware warranty with 24x7 ThinkAgile Advantage Single Point of Support (Lenovo server hardware and VMware software; requires an active software support contract purchased either from VMware or Lenovo) and various levels of coverage with a well-defined scope of services, including service hours, response time, term of service, and service agreement terms and conditions.

The Lenovo local support centers perform problem determination and resolution for hardware-related issues and escalate to VMware, on behalf of the customer, for software-related problem determination. VMware will contact the customer and will own the software-related problem resolution until closure.

The standard warranty terms are customer-replaceable unit (CRU) and onsite (for field-replaceable units FRUs only) with standard call center support during normal business hours and 9x5 Next Business Day Parts Delivered.

Lenovo's additional support services provide a sophisticated, unified support structure for your data center, with an experience consistently ranked number one in customer satisfaction worldwide. Available offerings include:

- **Premier Support**

Premier Support provides a Lenovo-owned customer experience and delivers direct access to technicians skilled in hardware, software, and advanced troubleshooting, in addition to the following:

- Direct technician-to-technician access through a dedicated phone line
- 24x7x365 remote support
- Single point of contact service
- End to end case management
- Third-party collaborative software support
- Online case tools and live chat support
- On-demand remote system analysis

- **Warranty Upgrade (Preconfigured Support)**

Services are available to meet the on-site response time targets that match the criticality of your systems.

- 3, 4, or 5 years of service coverage
- 1-year or 2-year post-warranty extensions
- **Foundation Service:** 9x5 service coverage with next business day onsite response. YourDrive YourData is an optional extra (see below).
- **Essential Service:** 24x7 service coverage with 4-hour onsite response or 24-hour committed repair (available only in select countries). Bundled with YourDrive YourData.
- **Advanced Service:** 24x7 service coverage with 2-hour onsite response or 6-hour committed repair (available only in select countries). Bundled with YourDrive YourData.

- **Managed Services**

Lenovo Managed Services provides continuous 24x7 remote monitoring (plus 24x7 call center availability) and proactive management of your data center using state-of-the-art tools, systems, and practices by a team of highly skilled and experienced Lenovo services professionals.

Quarterly reviews check error logs, verify firmware & OS device driver levels, and software as needed. We'll also maintain records of latest patches, critical updates, and firmware levels, to ensure you systems are providing business value through optimized performance.

- **Technical Account Management (TAM)**

A Lenovo Technical Account Manager helps you optimize the operation of your data center based on a deep understanding of your business. You gain direct access to your Lenovo TAM, who serves as your single point of contact to expedite service requests, provide status updates, and furnish reports to track incidents over time. In addition, your TAM will help proactively make service recommendations and manage your service relationship with Lenovo to make certain your needs are met.

- **Enterprise Server Software Support**

Enterprise Software Support is an additional support service providing customers with software support on Microsoft, Red Hat, SUSE, and VMware applications and systems. Around the clock availability for critical problems plus unlimited calls and incidents helps customers address challenges fast, without incremental costs. Support staff can answer troubleshooting and diagnostic questions, address product comparability and interoperability issues, isolate causes of problems, report defects to software vendors, and more.

- **YourDrive YourData**

Lenovo's YourDrive YourData is a multi-drive retention offering that ensures your data is always under your control, regardless of the number of drives that are installed in your Lenovo server. In the unlikely event of a drive failure, you retain possession of your drive while Lenovo replaces the failed drive part. Your data stays safely on your premises, in your hands. The YourDrive YourData service can be purchased in convenient bundles and is optional with Foundation Service. It is bundled with Essential Service and Advanced Service.

- **Health Check**

Having a trusted partner who can perform regular and detailed health checks is central to maintaining efficiency and ensuring that your systems and business are always running at their best. Health Check supports Lenovo-branded server, storage, and networking devices, as well as select Lenovo-supported products from other vendors that are sold by Lenovo or a Lenovo-Authorized Reseller.

Examples of region-specific warranty terms are second or longer business day parts delivery or parts-only base warranty.

If warranty terms and conditions include onsite labor for repair or replacement of parts, Lenovo will dispatch a service technician to the customer site to perform the replacement. Onsite labor under base warranty is limited to labor for replacement of parts that have been determined to be field-replaceable units (FRUs). Parts that are determined to be customer-replaceable units (CRUs) do not include onsite labor under base warranty.

If warranty terms include parts-only base warranty, Lenovo is responsible for delivering only replacement parts that are under base warranty (including FRUs) that will be sent to a requested location for self-service. Parts-only service does not include a service technician being dispatched onsite. Parts must be changed at customer's own cost and labor and defective parts must be returned following the instructions supplied with the spare parts.

Lenovo Service offerings are region-specific. Not all preconfigured support and upgrade options are available in every region. For information about Lenovo service upgrade offerings that are available in your region, refer to the following resources:

- Service part numbers in Lenovo Data Center Solution Configurator (DCSC):
<http://dcsc.lenovo.com/#/services>
- Lenovo Services Availability Locator
<http://lenovolocator.com/>

For service definitions, region-specific details, and service limitations, please refer to the following documents:

- Lenovo Statement of Limited Warranty for Infrastructure Solutions Group (ISG) Servers and System Storage
<http://pcsupport.lenovo.com/us/en/solutions/ht503310>
- Lenovo Data Center Services Agreement
<http://support.lenovo.com/us/en/solutions/ht116628>

Software maintenance

The ThinkAgile VX Series Integrated Systems (appliances) include one- (PRC only), three-, or five-year software support and subscription (matches the duration of the selected warranty period) that entitles customers to submit service requests to troubleshoot VMware software issues and receive code updates, including fixes, patches, and new software releases.

The Lenovo local support centers perform problem determination and resolution for hardware-related issues and escalate to VMware, on behalf of the customer, for software-related problem determination. VMware will contact the customer and will own the software-related problem resolution until closure.

For the VMware vSphere, vSAN, and vCenter Server software and subscription licenses purchased from Lenovo together with the ThinkAgile VX Series Integrated Systems, software support that is provided by VMware includes Production-level support with 24x7 phone and web coverage with the following target response times (priorities are defined by VMware based on the impact on productivity):

- Severity 1 (Critical: Substantial loss or disruption of service, significant risk of data loss): 30 minutes
- Severity 2 (Major: Operations are severely constrained, significant impact): 4 business hours
- Severity 3 (Minor: Non-critical loss of functionality, minimal impact): 8 business hours
- Severity 4 (Cosmetic: General questions): 12 business hours

For the VMware software and subscription licenses provided by the customer, software support that is provided by VMware is based on the support level included with these licenses.

Deployment services

The following optional Lenovo basic installation services are available for the ThinkAgile VX Series Integrated Systems (appliances):

- Unpacking and inspecting the systems
- Mounting the systems in a rack cabinet
- Connecting the systems to electrical power and network
- Checking and updating firmware to the latest levels
- Verifying operations
- Disposal of the packaging materials (within the customer site)

The following Lenovo deployment services are available for the ThinkAgile VX Series Integrated Systems to get customers up and running quickly:

- Conducting remote preparation and planning
- Verifying firmware versions and performing firmware updates, if needed
- Configuring XCC management settings
- Configuring hypervisor settings
- Configuring vSAN
- Configuring VMware vCenter Server and discovering hosts and storage
- Configuring Lenovo XClarity network settings and performing discovery and inventory
- Transferring knowledge
- Developing post-installation documentation

The following table lists ThinkAgile Health Check & Deployment offerings are available for ThinkAgile VX customers. These offerings are performed by Lenovo Professional Services.

- **Onsite Deployment:** Install, configure, and validate solution on-site, and conduct knowledge transfer.
- **Remote Deployment:** Install, configure, and validate solution remotely, and conduct knowledge transfer.
- **Remote Health Check:** Report & remediation of hardware and cluster health issues, including firmware and software updates.

Table 19. ThinkAgile Deployment offerings

Part number	Description
Onsite deployment services	
5MS7B00082	ThinkAgile VX Onsite Deployment (up to 4 nodes)
5MS7B00083	ThinkAgile VX Onsite Deployment (additional node)
Remote deployment services	
5MS7A87711	ThinkAgile VX Remote Deployment (up to 4 nodes)
5MS7A87712	ThinkAgile VX Remote Deployment (additional node)
Annual Remote Health Check	
5MS7B00178	ThinkAgile VX 1X Annual Remote Health Check (up to 4 node cluster)
5MS7B00179	ThinkAgile VX 1X Annual Remote Health Check (additional node)
5MS7B00059	ThinkAgile VX 1X Annual Remote Health Check & Update (up to 4 node cluster)
5MS7B00060	ThinkAgile VX 1X Annual Remote Health Check & Update (additional node)

For more information, refer to the Data Center Implementation Services web page:

<https://www.lenovo.com/us/en/data-center/services/implementation-services/>

Regulatory compliance

The server conforms to the following standards:

- Energy Star 3.0
- FCC: Verified to comply with Part 15 of the FCC Rules, Class A
- Canada ICES-003, issue 6, Class A
- UL/IEC 62368-1
- CAN/CSA-C22.2 No. 62368-1
- NOM-019
- Argentina IEC 62368-1
- Japan VCCI, Class A
- Australia/New Zealand AS/NZS CISPR 32, Class A; AS/NZS 60950.1
- IEC 60950-1 & IEC 62368-1 (CB Certificate and CB Test Report)
- China CCC (GB4943.1), GB9254 Class A, GB17625.1
- Taiwan BSMI CNS13438, Class A; CNS14336-1; section 5 of CNS15663
- Korea KN32, Class A; KN35
- Russia, Belorussia and Kazakhstan, EAC: TP TC 004/2011 (for Safety); TP TC 020/2011 (for EMC); TP EAC 037/2016 (for RoHS)
- CE Mark (EN55032 Class A, EN60950-1, EN62368-1, EN55024, EN55035, EN61000-3-2, (EU) 2019/424, EN 50581-1 and EN61000-3-3)
- CISPR 32, Class A
- TUV-GS (EN62368-1, EK1-ITB2000, AfPS GS 01 PAK Par. 3.1)
- India BIS certification

Lenovo Financial Services

Lenovo Financial Services reinforces Lenovo's commitment to deliver pioneering products and services that are recognized for their quality, excellence, and trustworthiness. Lenovo Financial Services offers financing solutions and services that complement your technology solution anywhere in the world.

We are dedicated to delivering a positive finance experience for customers like you who want to maximize your purchase power by obtaining the technology you need today, protect against technology obsolescence, and preserve your capital for other uses.

We work with businesses, non-profit organizations, governments and educational institutions to finance their entire technology solution. We focus on making it easy to do business with us. Our highly experienced team of finance professionals operates in a work culture that emphasizes the importance of providing outstanding customer service. Our systems, processes and flexible policies support our goal of providing customers with a positive experience.

We finance your entire solution. Unlike others, we allow you to bundle everything you need from hardware and software to service contracts, installation costs, training fees, and sales tax. If you decide weeks or months later to add to your solution, we can consolidate everything into a single invoice.

Our Premier Client services provide large accounts with special handling services to ensure these complex transactions are serviced properly. As a premier client, you have a dedicated finance specialist who manages your account through its life, from first invoice through asset return or purchase. This specialist develops an in-depth understanding of your invoice and payment requirements. For you, this dedication provides a high-quality, easy, and positive financing experience.

For your region-specific offers, please ask your Lenovo sales representative or your technology provider about the use of Lenovo Financial Services. For more information, see the following Lenovo website:

<https://www.lenovo.com/us/en/landingpage/lenovo-financial-services/>

Related publications and links

For more information, see these resources:

- Lenovo ThinkAgile VX Series
<https://www.lenovo.com/us/en/data-center/software-defined-infrastructure/ThinkAgile-VX-Series/p/WMD00000340>
- ThinkAgile VX - Best Recipes
<http://datacentersupport.lenovo.com/us/en/solutions/HT505302>
- VMware documentation
<https://docs.vmware.com/>
- ThinkSystem SR630 product guide:
<https://lenovopress.com/lp1049-thinksystem-sr630-server>
- Interactive 3D Tour of the ThinkSystem SR630:
<https://lenovopress.com/lp0672-3d-tour-thinksystem-sr630>
- Lenovo Press video walk-through of the ThinkSystem SR630:
<https://lenovopress.com/lp0699-thinksystem-sr630-server-video-walkthrough>

Related product families

Product families related to this document are the following:

- [2-Socket Rack Servers](#)
- [ThinkAgile VX Series for VMware vSAN](#)

Notices

Lenovo may not offer the products, services, or features discussed in this document in all countries. Consult your local Lenovo representative for information on the products and services currently available in your area. Any reference to a Lenovo product, program, or service is not intended to state or imply that only that Lenovo product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any Lenovo intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any other product, program, or service. Lenovo may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

Lenovo (United States), Inc.
8001 Development Drive
Morrisville, NC 27560
U.S.A.
Attention: Lenovo Director of Licensing

LENOVO PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. Lenovo may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

The products described in this document are not intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. The information contained in this document does not affect or change Lenovo product specifications or warranties. Nothing in this document shall operate as an express or implied license or indemnity under the intellectual property rights of Lenovo or third parties. All information contained in this document was obtained in specific environments and is presented as an illustration. The result obtained in other operating environments may vary. Lenovo may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Any references in this publication to non-Lenovo Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this Lenovo product, and use of those Web sites is at your own risk. Any performance data contained herein was determined in a controlled environment. Therefore, the result obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

© Copyright Lenovo 2021. All rights reserved.

This document, LP1501, was created or updated on November 8, 2021.

Send us your comments in one of the following ways:

- Use the online Contact us review form found at:
<https://lenovopress.com/LP1501>
- Send your comments in an e-mail to:
comments@lenovopress.com

This document is available online at <https://lenovopress.com/LP1501>.

Trademarks

Lenovo and the Lenovo logo are trademarks or registered trademarks of Lenovo in the United States, other countries, or both. A current list of Lenovo trademarks is available on the Web at <https://www.lenovo.com/us/en/legal/copytrade/>.

The following terms are trademarks of Lenovo in the United States, other countries, or both:

Lenovo®
AnyBay®
Lenovo Services
ThinkAgile
ThinkSystem
TruDDR4
XClarity®

The following terms are trademarks of other companies:

Intel®, Intel Optane™, and Xeon® are trademarks of Intel Corporation or its subsidiaries.

Microsoft®, SQL Server®, and SharePoint® are trademarks of Microsoft Corporation in the United States, other countries, or both.

Other company, product, or service names may be trademarks or service marks of others.